

# INTE AUTO

PRODUCT CATALOGUE  
Waterproof Connectors



Shenzhen INTE-AUTO Technology Co., Ltd.  
Shenzhen Yinte Electronic Technology Co., Ltd.



Tel: +86-755-23011350  
Fax: +86-755-23239501



[www.inte-auto.com](http://www.inte-auto.com)  
[www.intewet.com](http://www.intewet.com)



[info@inte-auto.com](mailto:info@inte-auto.com)



5F, No.7, A area, Baoan Internet Industrial Zone,  
Baoyuan Road, Shenzhen, 518102, China

# INTE-AUTO Company Introduction



INTE-AUTO, registered in 2013, is a company based in Shenzhen China engaged in the design, research, and manufacture of precision push pull connectors, waterproof connectors, coaxial connectors, D-tap connectors, watertight aviation connector, custom cable assemblies and over molded cable assembly.

Our mission goes beyond supplying connectors. The ultimate goal is to consistently provide top-notch, secure, cost-effective, durable products, one-stop shop connectors and customized service for our esteemed clients worldwide.

Our high-quality waterproof connectors feature IP68 degree, and are designed to endure the most extreme environments. These connectors are widely used in a large variety of applications such as for medical, testing, measurement, military, sensor, NDT, and other machines and equipment.

INTE-AUTO has over 10,000 products, all of which are manufactured under the strictest quality standards. Our connectors are fully compatible with the push pull connectors of other top brands, and commit to the Quality Management System.



Our facilities span over 5000 square meters, containing 23 production lines with 25 CNC working machines. Our mechanized work system improves efficiency, guarantees high quality, and controls production costs to comply with military and medical standards.

INTE-AUTO is RoHS, CE, ISO9001, and TUV certified. We are actively shaping the future of our company with creativity, imagination, and innovation to continually exceed the expectations of all our valued customers around the world.


# Contents Table

1. INTE-AUTO Company Introduction	2
2. Applications	4
3. IP68 Waterproof Connectors Description	6
4. Connectors Material and Specification	6
5. Part Numbering Systems	7
6. INT13 - TP13 DP13 ZP13 Series Solder Type	8
INT13 - TP13 DP13 ZP13 Series Technical Characteristics	8
INT13 - TP13 Technical Characteristics	10
INT13 - DP13 Technical Characteristics	12
INT13 - ZP13 Technical Characteristics	15
7. INT13 - TP13 DP13 ZP13 Series Screw Type	18
INT13 - TP13 Technical Characteristics	19
INT13 - DP13 Technical Characteristics	19
INT13 - ZP13 Technical Characteristics	20
8. INT13 - TP17 DP17 ZP17 FP17 Series Solder Type	21
INT13 - TP17 DP17 ZP17 FP17 Series Technical Characteristics	21
INT13 - TP17 Technical Characteristics	23
INT13 - DP17 Technical Characteristics	25
INT13 - ZP17 Technical Characteristics	27
INT13 - FP17 Technical Characteristics	30
9. INT13 - TP17 DP17 ZP17 FP17 Series Screw Type	35
INT13 - TP17 Technical Characteristics	36
INT13 - DP17 Technical Characteristics	37
INT13 - ZP17 Technical Characteristics	38
INT13 - FP17 Technical Characteristics	40
10. INT13 - TP21 DP21 ZP21 FP21 Series Solder Type	44
INT13 - TP21 DP21 ZP21 FP21 Series Technical Characteristics	44
INT13 - TP21 Technical Characteristics	45
INT13 - DP21 Technical Characteristics	49
INT13 - ZP21 Technical Characteristics	53
INT13 - FP21 Technical Characteristics	57
11. INT13 - TP21 DP21 ZP21 FP21 Series Screw Type	65
INT13 - TP21 Technical Characteristics	66
INT13 - DP21 Technical Characteristics	68
INT13 - ZP21 Technical Characteristics	71
INT13 - FP21 Technical Characteristics	74
12. INT13 - WF Series Push Pull Connectors	80
WF Series Push Pull Fast Locking Connector	81
Product Feature and Performance Details	81
Part Numbering System	82
Part Section Showing Internal Components	83
INT13-WF6 Series Technical Characteristics	83
INT13-WF10 Series Technical Characteristics	84
INT13-WF12 Series Technical Characteristics	85

# Applications

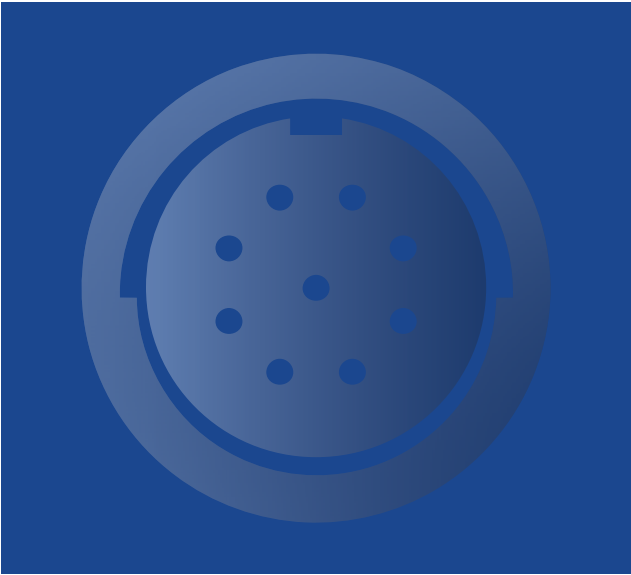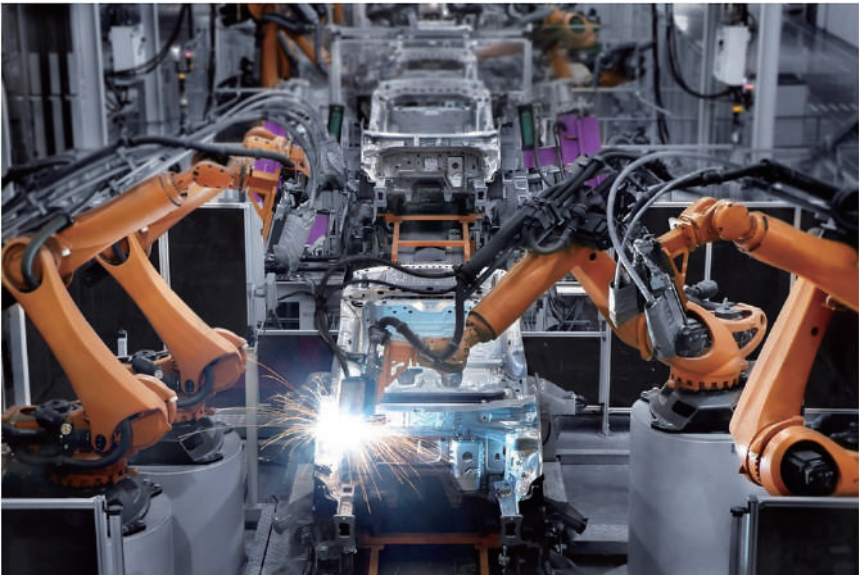

# Applications

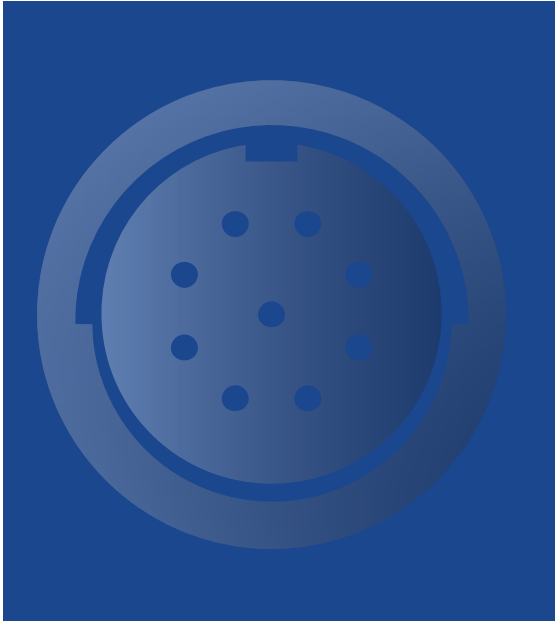

## IP68 Waterproof Connectors Description


INT13-TP Series Plastic Threaded Waterproof Connectors: a range of reliable, IP68-rated connectors designed for demanding environments. With options like the SP13 SP17 SP21 series, these connectors offer secure, threaded coupling for both cable-to-cable and cable-to-panel connections. Featuring durable plastic out shell with brass contacts and gold plating, they ensure longevity and optimal conductivity.

INT13-TP Series connectors are ideal for applications ranging from outdoor LED lighting, LED panel screens, outdoor security cameras, solar energy inverter, medical device, communications, control systems, measuring equipment and testing equipment, for data and power. These connectors provide watertight connections for various indoor and outdoor scenarios, guaranteeing reliable performance in harsh conditions.

## Material and Specification

<b>Mating</b>	<b>Threaded coupling</b>
<b>Outshell Material</b>	<b>Nylon66 fire resistance: V0</b>
<b>Insert Material</b>	<b>PPS, max temperature 260°</b>
<b>Contact Material</b>	<b>Brass with gold plating</b>
<b>Wiring Method</b>	<b>Soldering</b>
<b>Cable Outer Diameter Range</b>	<b>TP13: A: 4 – 6.5mm B: 5.0 – 8.0mm TP17: 7.0 – 10.0mm TP21: A: 4.5 – 7.0mm B: 7.0- 12.0mm</b>
<b>IP Rating</b>	<b>IP68</b>
<b>Mating Cycle</b>	<b>≥500 times</b>
<b>Temperature Range</b>	<b>-25 °C ~ +85 °C</b>
<b>Insulation Resistance</b>	<b>2000 MΩ</b>

## Part Numbering Systems

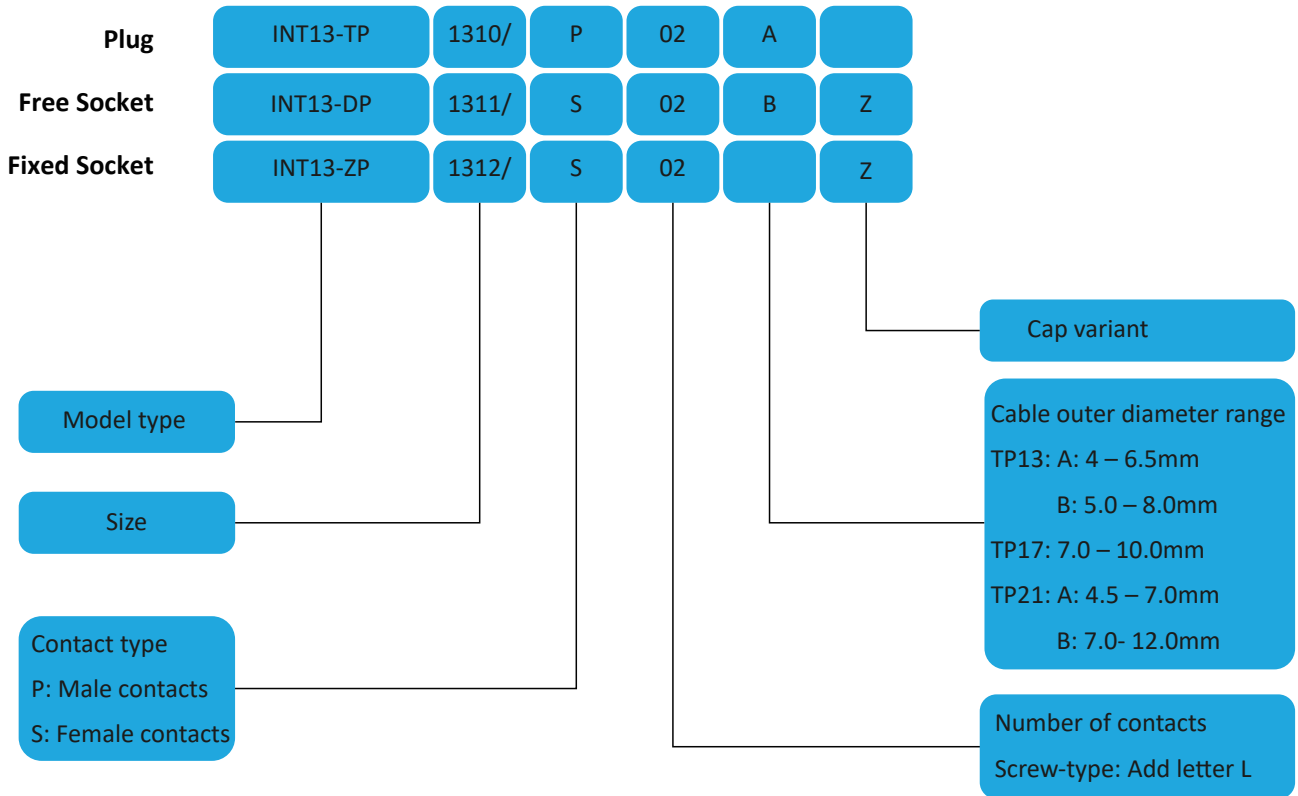

INT13-TP1310/P02A = TP13 series 2 Pins straight plug, male solder contacts, cable outer diameter range A: 4 – 6.5mm

INT13-DP1311/S02BZ = TP13 series 2 Pins in-line cable receptacle, female solder contacts, cable outer diameter range B: 5.0 – 8.0mm, with cap

INT13-ZP1312/S02LZ = TP13 series 2 Pins panel mount receptacle, female solder contacts, screw-type, with cap

Note: To order a model with cap, a letter "Z" is in the variant position.

To order a screw-type for pins, a letter "L" is in the variant position.











## INT13 - TP13 DP13 ZP13 Series Solder Type

- INT13 - TP13 DP13 ZP13 Series Technical Characteristics
- INT13 - TP13 Technical Characteristics
- INT13 - DP13 Technical Characteristics
- INT13 - ZP13 Technical Characteristicstt




## INT13-TP13 DP13 ZP13 Series Technical


Number of contacts	1	2	3	4	5	6	7	9
Male contact face view								
Rated current(A)	30A	16A	16A	5A	5A	5A	5A	3A
Contact diameter	3.0 * 1	1.6 * 2	1.6 * 3	1.0 * 4	1.0 * 5	1.0 * 6	1.0 * 7	0.7 * 9
Contact	Solder / Crimp							
Rated voltage (AC. V)	500	250	250	200	180	125	125	125
Test voltage (AC. V)1min	1500	1500	1500	1500	1000	1000	1000	1000
Contact resistance mΩ	0.5	2	2	5	5	5	5	10
Wire size for screw crimp m <sup>2</sup> / AWG	≤4/11	≤2/14	≤2/14	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18

## Part Number: INT13-TP1310/P01

## TP13 Series Straight Plug, 1 Pin

### Pin Array and Specification

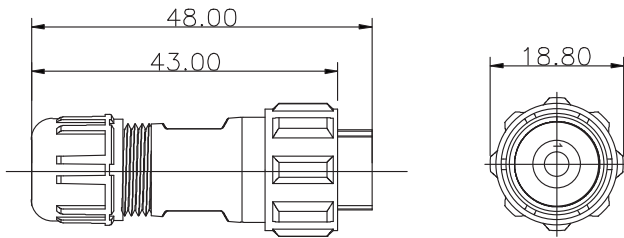



Number of contacts	1
Male contact face view	
Rated current (A)	30A
Contact diameter	3.0 * 1
Rated voltage (AC. V)	500
Test voltage (AC. V) 1 min	1500
Contact resistance	0.5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤4/11

## Part Number: INT13-TP1310/P02

## TP13 Series Straight Plug, 2 Pins

### Pin Array and Specification

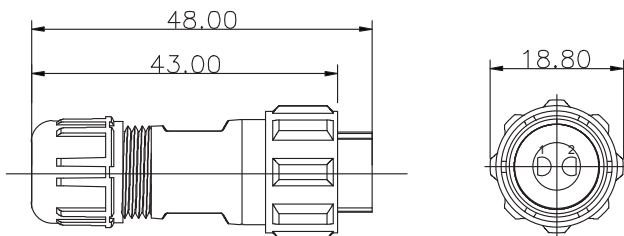



Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

## Part Number: INT13-TP1310/P03

## TP13 Series Straight Plug, 3 Pins


### Pin Array and Specification

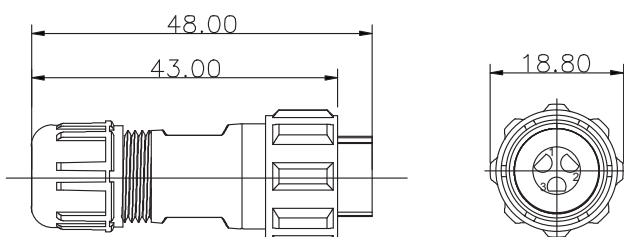

Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

## Part Number: INT13-TP1310/P04 TP13 Series Straight Plug, 4 Pins


### Pin Array and Specification

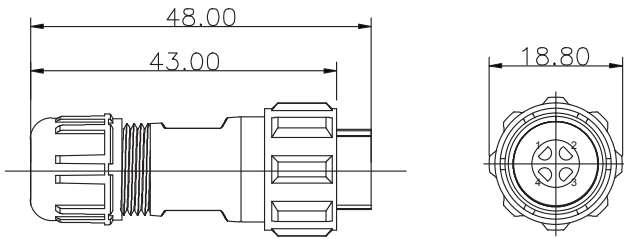

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Rated voltage (AC. V)	200
Test voltage (AC. V) 1 min	1500
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤4/11

## Part Number: INT13-TP1310/P05 TP13 Series Straight Plug, 5 Pins


### Pin Array and Specification

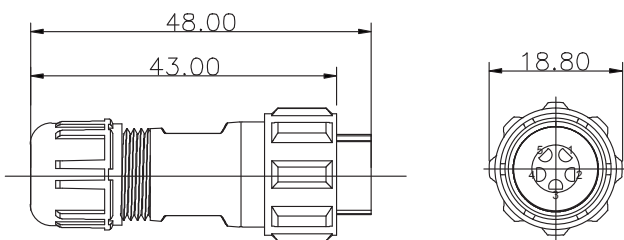

Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Rated voltage (AC. V)	180
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	0.785/18


## Part Number: INT13-TP1310/P06 TP13 Series Straight Plug, 6 Pins

### Pin Array and Specification

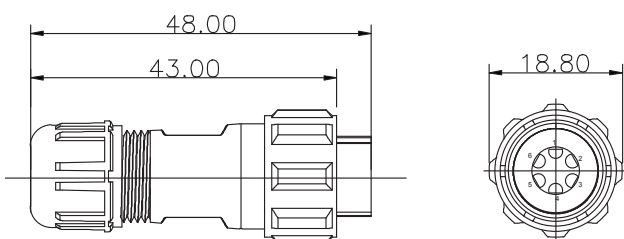


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

Pin Array and Specification

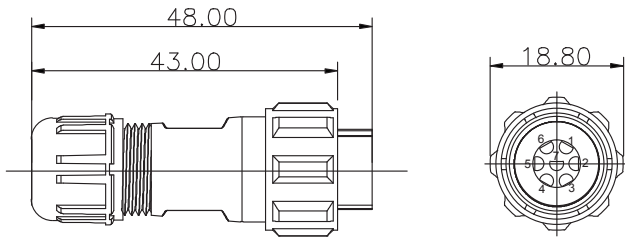

Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18


Pin Array and Specification

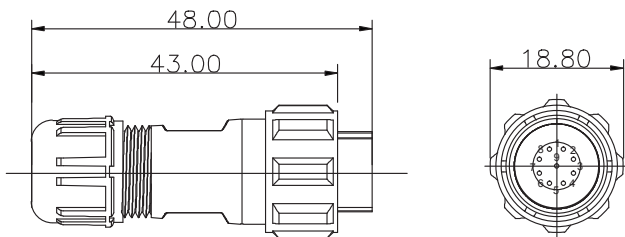

Number of contacts	9
Male contact face view	
Rated current (A)	3A
Contact diameter	0.7 * 9
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	10MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

INT13 - DP13 Technical Characteristics


Pin Array and Specification

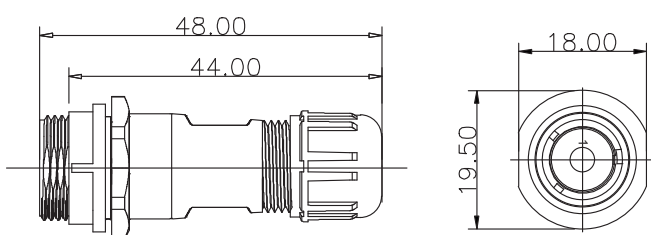


Number of contacts	1
Male contact face view	
Rated current (A)	30A
Contact diameter	3.0 * 1
Rated voltage (AC. V)	500
Test voltage (AC. V) 1 min	1500
Contact resistance	0.5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤4/11

## Part Number: INT13-DP1311/S02 DP13 Series In-Line Cable Connector, 2 Pins


### Pin Array and Specification

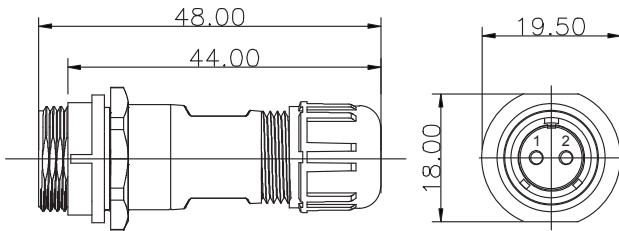


Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

## Part Number: INT13-DP1311/S03 DP13 Series In-Line Cable Connector, 3 Pins


### Pin Array and Specification

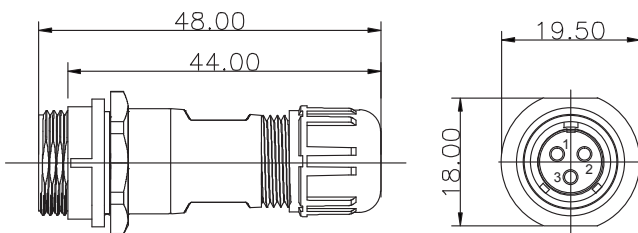


Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

## Part Number: INT13-DP1311/S04 DP13 Series In-Line Cable Connector, 4 Pins


### Pin Array and Specification

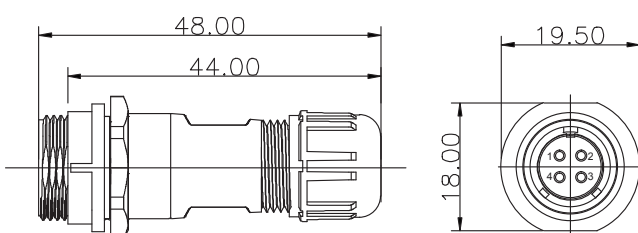


Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Rated voltage (AC. V)	200
Test voltage (AC. V) 1 min	1500
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

**Part Number: INT13-DP1311/S05 DP13 Series In-Line Cable Connector, 5 Pins**


**Pin Array and Specification**

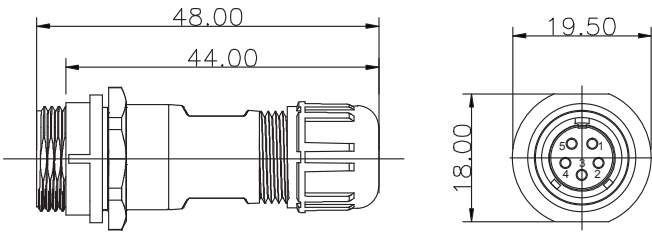


<b>Number of contacts</b>	<b>5</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0 * 5</b>
<b>Rated voltage (AC. V)</b>	<b>180</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1000</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>≤0.785/18</b>

**Part Number: INT13-DP1311/S06 DP13 Series In-Line Cable Connector, 6 Pins**


**Pin Array and Specification**

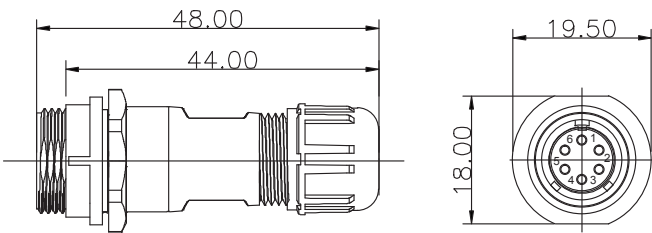


<b>Number of contacts</b>	<b>6</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0 * 6</b>
<b>Rated voltage (AC. V)</b>	<b>125</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1000</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>≤0.785/18</b>

**Part Number: INT13-DP1311/S07 DP13 Series In-Line Cable Connector, 7 Pins**


**Pin Array and Specification**

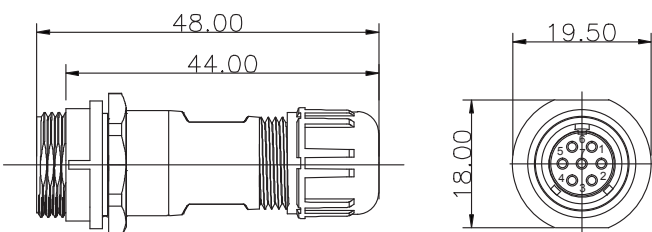


<b>Number of contacts</b>	<b>7</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0 * 7</b>
<b>Rated voltage (AC. V)</b>	<b>125</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1000</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>≤0.785/18</b>

# Part Number: INT13-DP1311/S09 DP13 Series In-Line Cable Connector, 9 Pins

## Pin Array and Specification

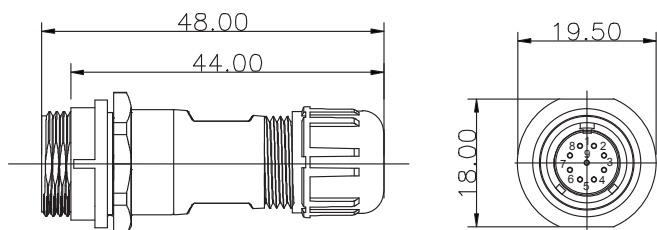



Number of contacts	9
Male contact face view	
Rated current (A)	3A
Contact diameter	0.7 * 9
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	10MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

## INT13 - ZP13 Technical Characteristics

# Part Number: INT13-ZP1312/S01 ZP13 Series Rear Mount Receptacle, 1 Pin


## Pin Array and Specification

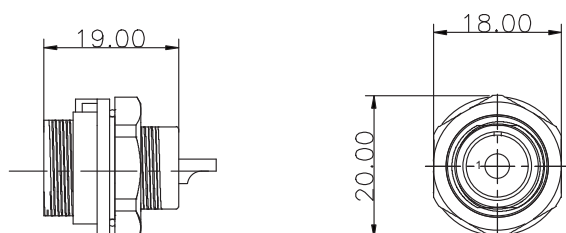


Number of contacts	1
Male contact face view	
Rated current (A)	30A
Contact diameter	3.0 * 1
Rated voltage (AC. V)	500
Test voltage (AC. V) 1 min	1500
Contact resistance	0.5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤4/11


# Part Number: INT13-ZP1312/S02 ZP13 Series Rear Mount Receptacle, 2 Pins

## Pin Array and Specification

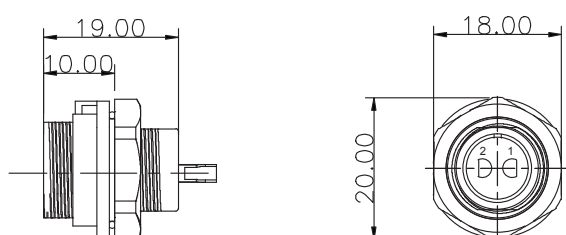


Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

Pin Array and Specification

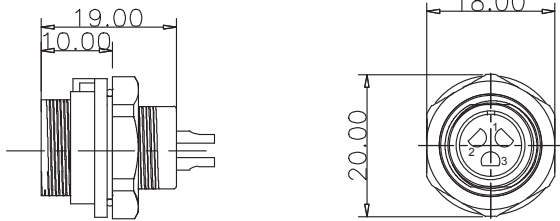


Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

Pin Array and Specification

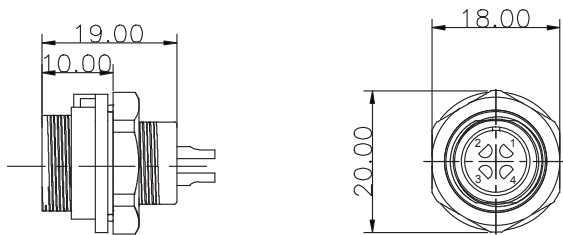

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Rated voltage (AC. V)	200
Test voltage (AC. V) 1 min	1500
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

Pin Array and Specification

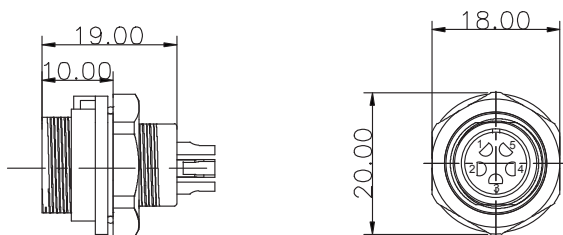



Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Rated voltage (AC. V)	180
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18



# Part Number: INT13-ZP1312/S06 ZP13 Series Rear Mount Receptacle, 6 Pins


## Pin Array and Specification

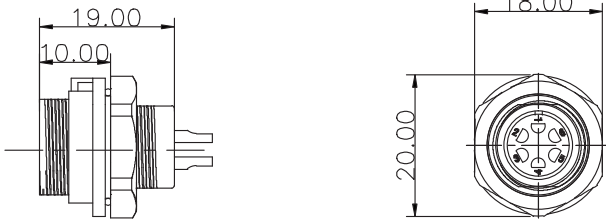


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

# Part Number: INT13-ZP1312/S07 ZP13 Series Rear Mount Receptacle, 7 Pins


## Pin Array and Specification

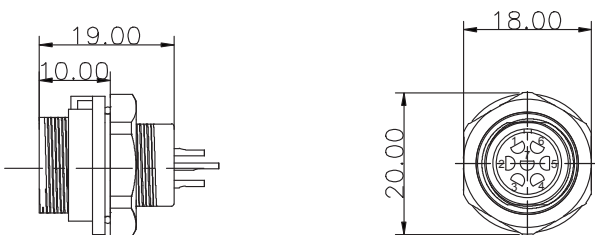


Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

# Part Number: INT13-ZP1312/S09 ZP13 Series Rear Mount Receptacle, 9 Pins

## Pin Array and Specification

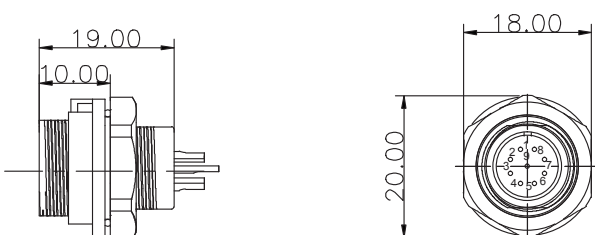

Number of contacts	9
Male contact face view	
Rated current (A)	3A
Contact diameter	0.7 * 9
Rated voltage (AC. V)	125
Test voltage (AC. V) 1 min	1000
Contact resistance	10MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18




## INT13 - TP13 DP13 ZP13 Series Screw Type


- INT13 - TP13 Technical Characteristics
- INT13 - DP13 Technical Characteristics
- INT13 - ZP13 Technical Characteristics

# INT13 - TP13 Technical Characteristics

## Part Number: INT13-TP1310/P02L TP13 Series Straight Plug, 2 Pins


### Pin Array and Specification

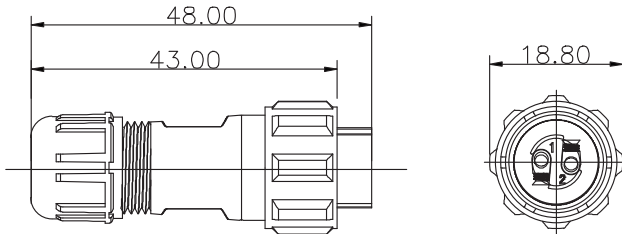


Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

## Part Number: INT13-TP1310/P03L TP13 Series Straight Plug, 3 Pins

### Pin Array and Specification

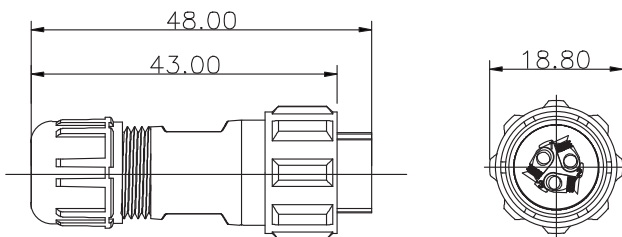



Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

# INT13 - DP13 Technical Characteristics


## Part Number: INT13-DP1311/S02L DP13 Series In-Line Cable Connector, 2 Pins

### Pin Array and Specification

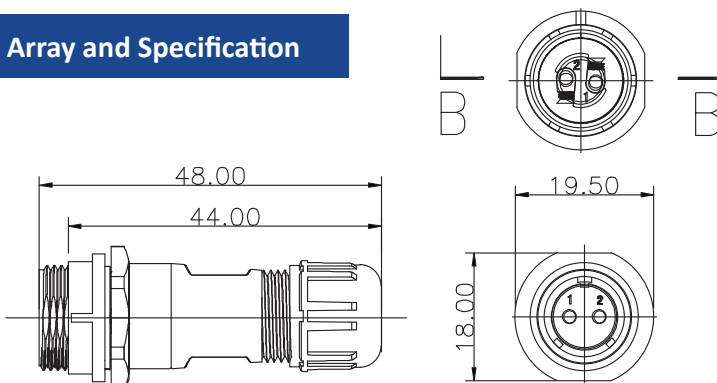

Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14


Pin Array and Specification

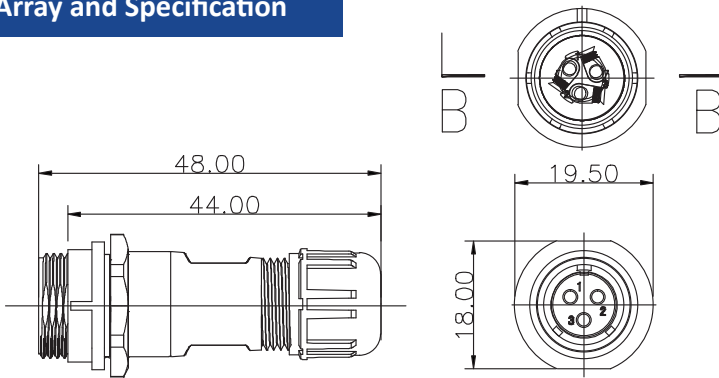

Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14


INT13 - ZP13 Technical Characteristics

Pin Array and Specification

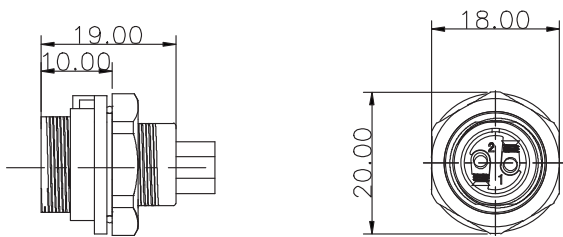

Number of contacts	2
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 2
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14

Pin Array and Specification

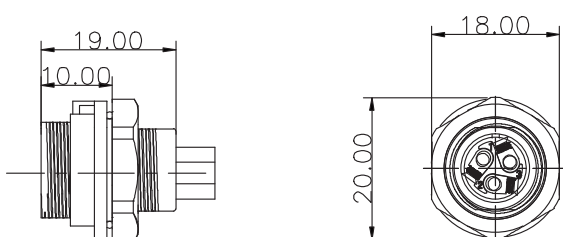








Number of contacts	3
Male contact face view	
Rated current (A)	16A
Contact diameter	1.6 * 3
Rated voltage (AC. V)	250
Test voltage (AC. V) 1 min	1500
Contact resistance	2MΩ
Wire size solder mm <sup>2</sup> /AWG	≤2/14



## INT13 - TP17 DP17 ZP17 FP17 Series Solder Type


- INT13 - TP17 DP17 ZP17 FP17 Series Technical Characteristics
- INT13 - TP17 Technical Characteristics
- INT13 - DP17 Technical Characteristics
- INT13 - ZP17 Technical Characteristics
- INT13 - FP17 Technical Characteristics

## INT13-TP17 DP17 ZP17 FP17 Series Technical Characteristics

Number of contacts	2	3	4	5	6	7	9
Male contact face view							
Rated current(A)	10A	10A	5A	5A	5A	5A	5A
Contact diameter	1.5 * 2	1.5 * 3	1.0 * 4	1.0 * 5	1.0 * 6	1.0 * 7	1.0 * 9
Contact	Solder / Crimp				Solder		
Rated voltage (AC. V)	500	500	500	500	400	400	400
Test voltage (AC. V)1min	1500	1500	1500	1500	1500	1500	1500
Contact resistance mΩ	2.5	2.5	5	5	5	5	5
Wire size for screw crimp m <sup>2</sup> / AWG	≤2/14	≤2/14	<0.785/18	<0.785/18	<0.785/18	<0.785/18	<0.785/18

## Part Number: INT13-TP1710/P02 TP17 Series Straight Plug, 2 Pins


### Pin Array and Specification

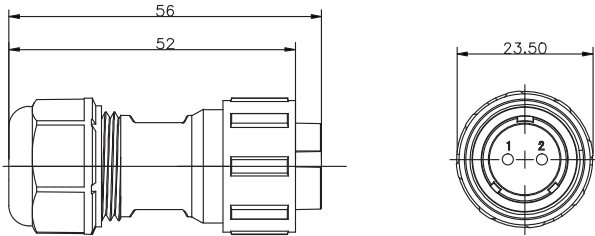

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP1710/P03 TP17 Series Straight Plug, 3 Pins


### Pin Array and Specification

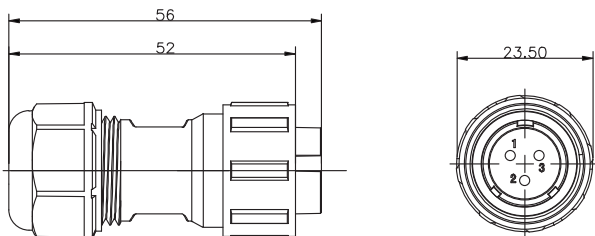

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14


## Part Number: INT13-TP1710/P04 TP17 Series Straight Plug, 4 Pins

### Pin Array and Specification

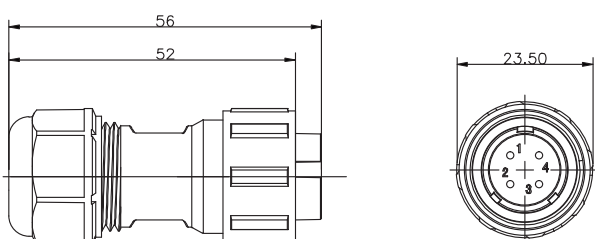


Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

Pin Array and Specification

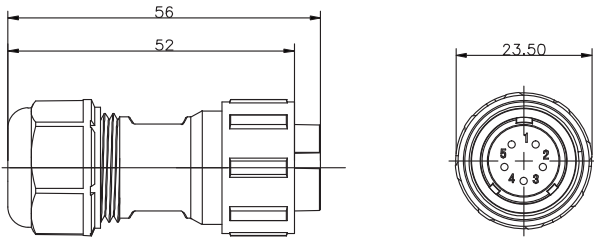


Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

Pin Array and Specification

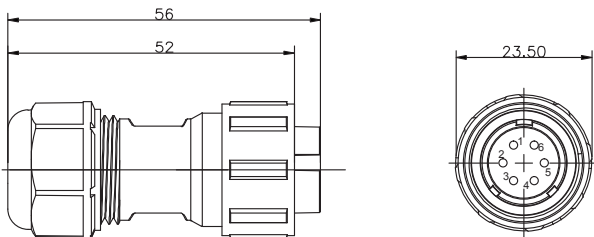

Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18


Pin Array and Specification

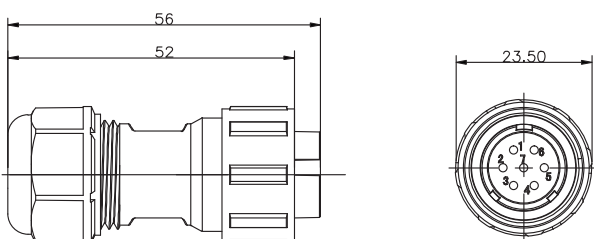


Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18



Pin Array and Specification

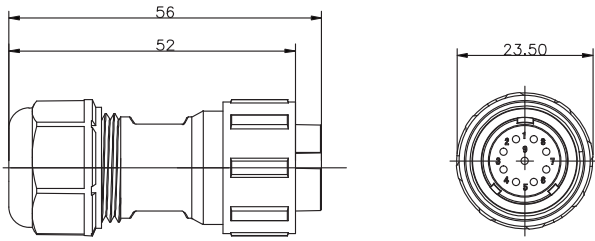



Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

INT13 - DP17 Technical Characteristics

Part Number: INT13-DP1711/S02 DP17 Series In-Line Cable Connector, 2 Pins


Pin Array and Specification

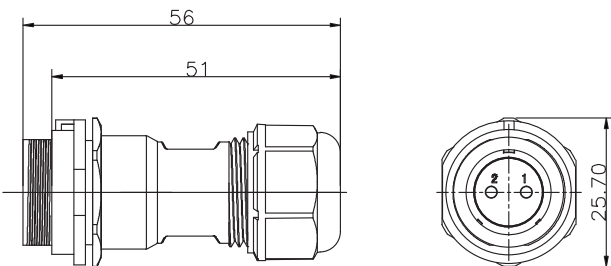


Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

Part Number: INT13-DP1711/S03 DP17 Series In-Line Cable Connector, 3 Pins


Pin Array and Specification

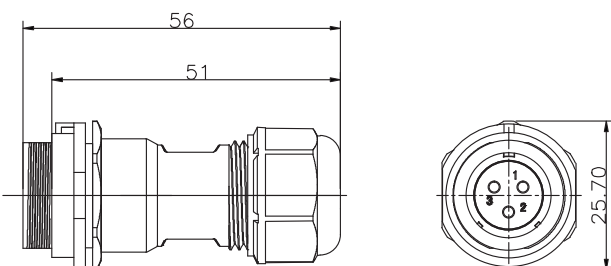

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-DP1711/S04 DP17 Series In-Line Cable Connector, 4 Pins


## Pin Array and Specification

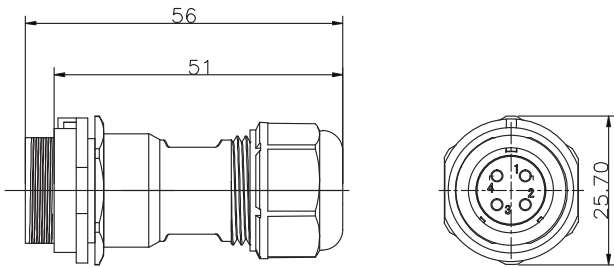

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-DP1711/S05 DP17 Series In-Line Cable Connector, 5 Pins


## Pin Array and Specification

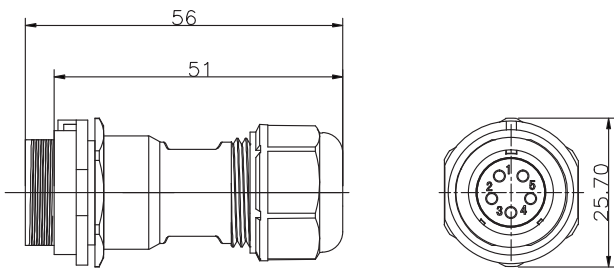

Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-DP1711/S06 DP17 Series In-Line Cable Connector, 6 Pins


## Pin Array and Specification

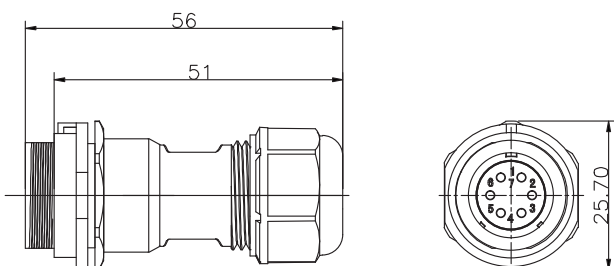


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-DP1711/S07 DP17 Series In-Line Cable Connector, 7 Pins


## Pin Array and Specification

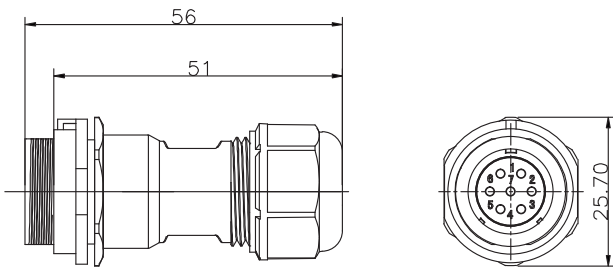


Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-DP1711/S09 DP17 Series In-Line Cable Connector, 9 Pins

## Pin Array and Specification

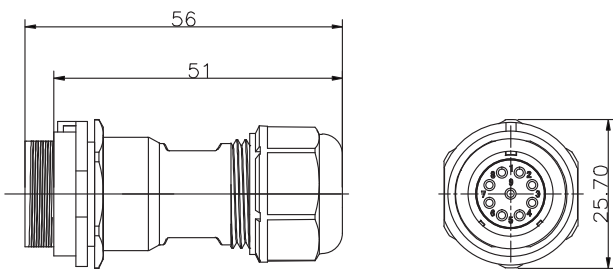



Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## INT13 - ZP17 Technical Characteristics

# Part Number: INT13-ZP1712/S02 ZP17 Series Rear Mount Receptacle, 2 Pins


## Pin Array and Specification

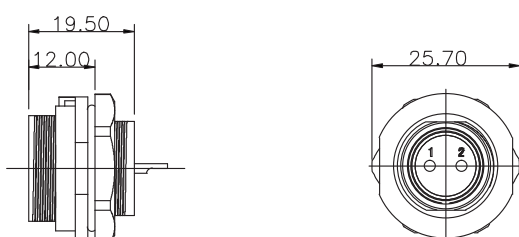

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-ZP1712/S03 ZP17 Series Rear Mount Receptacle, 3 Pins


### Pin Array and Specification

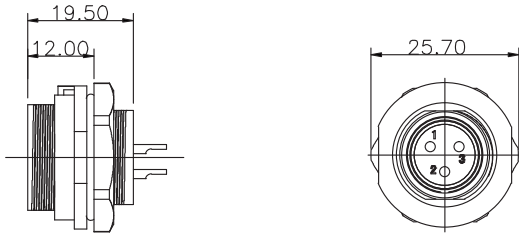

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-ZP1712/S04 ZP17 Series Rear Mount Receptacle, 4 Pins


### Pin Array and Specification

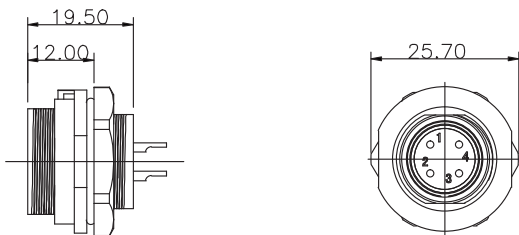

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-ZP1712/S05 ZP17 Series Rear Mount Receptacle, 5 Pins


### Pin Array and Specification

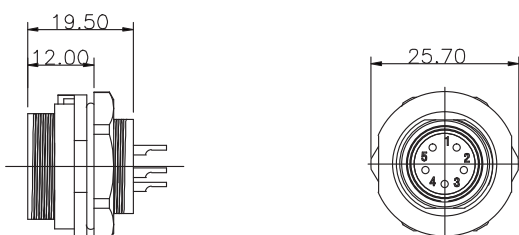


Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-ZP1712/S06 ZP17 Series Rear Mount Receptacle, 6 Pins


### Pin Array and Specification

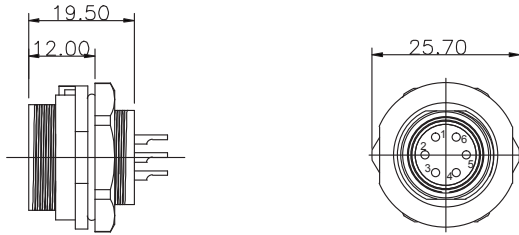


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-ZP1712/S07 ZP17 Series Rear Mount Receptacle, 7 Pins


### Pin Array and Specification

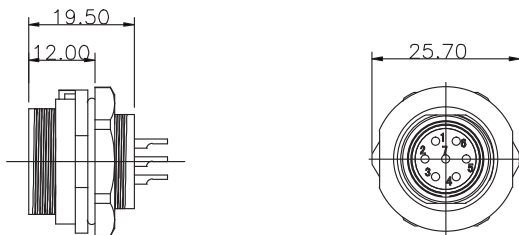


Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-ZP1712/S09 ZP17 Series Rear Mount Receptacle, 9 Pins


### Pin Array and Specification

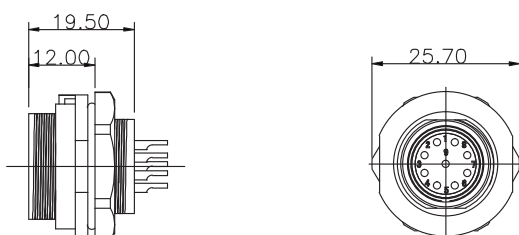

Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-FP1713/S02 FP17 Series 2-hole Flange Receptacle, 2 Pins


### Pin Array and Specification

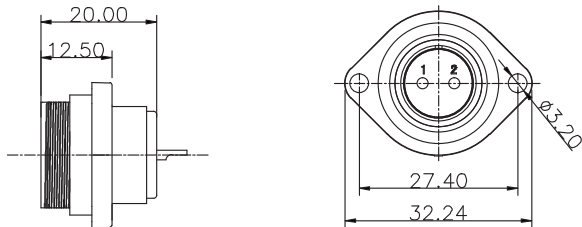

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-FP1713/S03 FP17 Series 2-hole Flange Receptacle, 3 Pins


### Pin Array and Specification

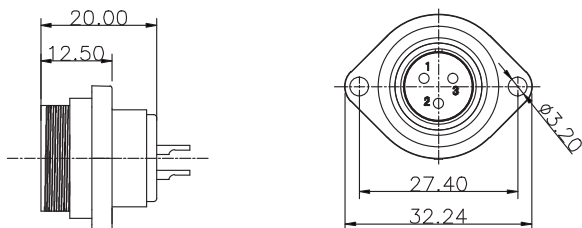

Number of contacts	3
Male contact face view	
Rated current (A)	1A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-FP1713/S04 FP17 Series 2-hole Flange Receptacle, 4 Pins


### Pin Array and Specification

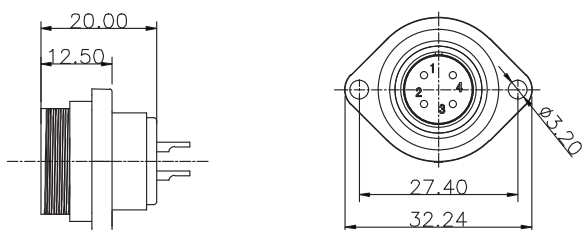


Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1713/S05 FP17 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

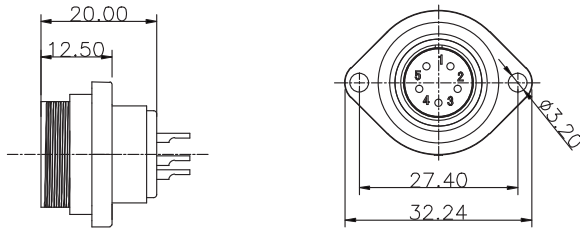


Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1713/S06 FP17 Series 2-hole Flange Receptacle, 6 Pins


## Pin Array and Specification

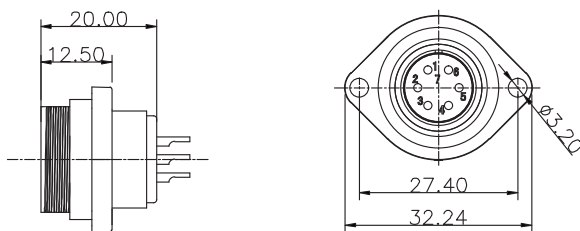


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1713/S07 FP17 Series 2-hole Flange Receptacle, 7 Pins


## Pin Array and Specification

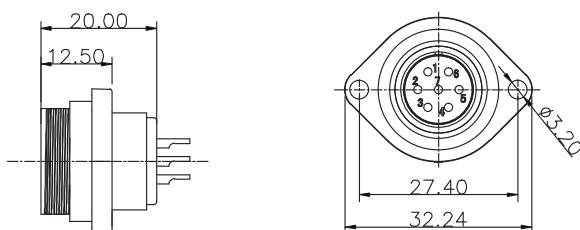


Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1713/S09 FP17 Series 2-hole Flange Receptacle, 9 Pins


## Pin Array and spec specification

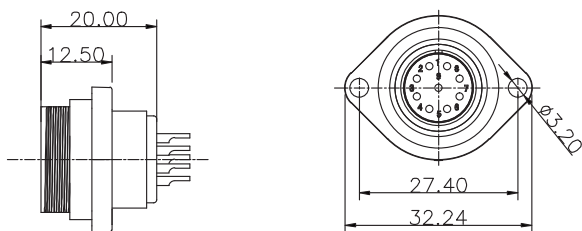


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1714/S02 FP17 Series 4-hole Flange Receptacle, 2 Pins


## Pin Array and Specification

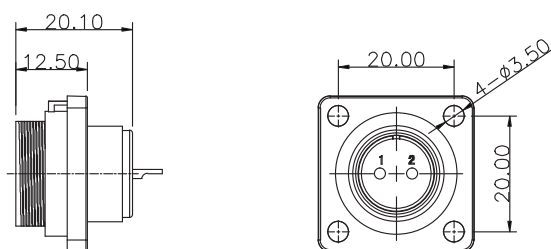


Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP1714/S03 FP17 Series 4-hole Flange Receptacle, 3 Pins

## Pin Array and Specification

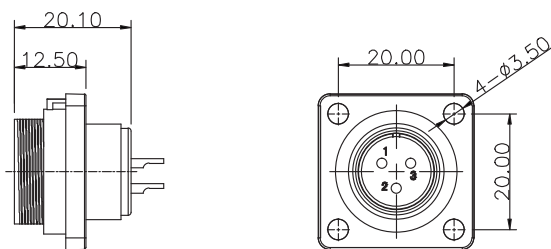


Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14



# Part Number: INT13-FP1714/S04 FP17 Series 4-hole Flange Receptacle, 4 Pins


## Pin Array and Specification

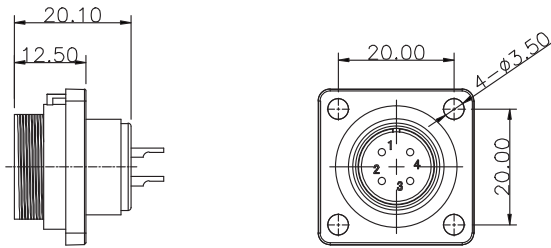

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1714/S05 FP17 Series 4-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

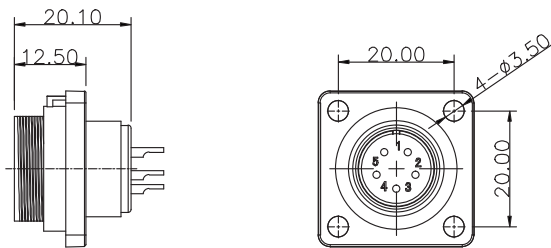

Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18


# Part Number: INT13-FP1714/S06 FP17 Series 4-hole Flange Receptacle, 6 Pins


## Pin Array and Specification

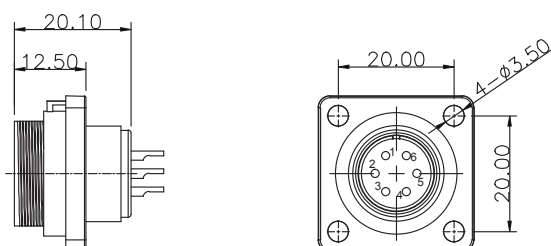


Number of contacts	6
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 6
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18


Pin Array and Specification

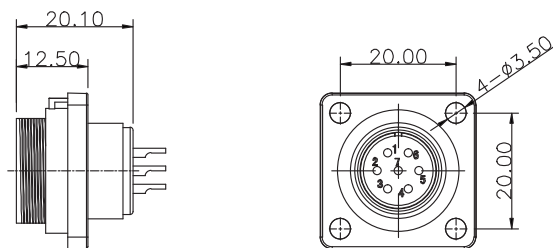

Number of contacts	7
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 7
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	≤0.785/18

Pin Array and Specification

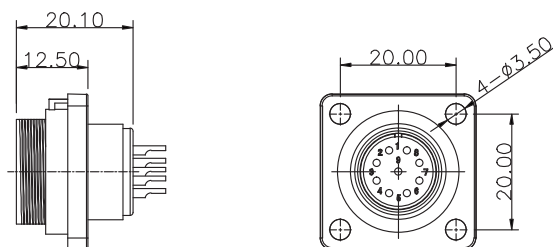

Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18





## INT13 - TP17 DP17 ZP17 FP17 Series Screw Type

- INT13 - TP17 Technical Characteristics
- INT13 - DP17 Technical Characteristics
- INT13 - ZP17 Technical Characteristics
- INT13 - FP17 Technical Characteristics

## Part Number: INT13-TP1710/P02L TP17 Series straight Plug, 2 Pins



### Pin Array and Specification

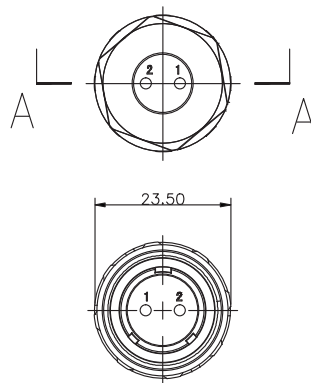

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP1710/P03L TP17 Series Straight Plug, 3 Pins



### Pin Array and Specification

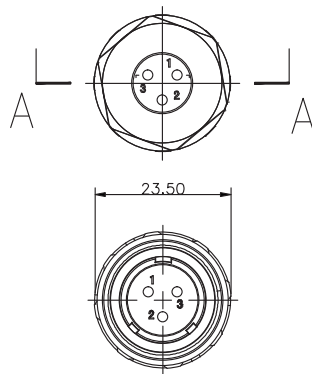

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP1710/P04L TP17 Series Straight Plug, 4 Pins



### Pin Array and Specification

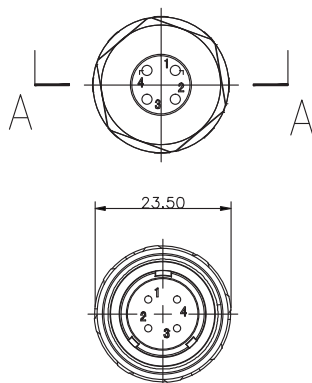

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-TP1710/P05L TP17 Series Straight Plug, 5 Pins

## Pin Array and Specification

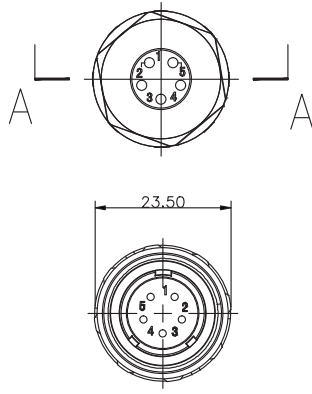



Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## INT13 - DP17 Technical Characteristics

### Part Number: INT13-DP1711/S02L DP17 Series In-Line Cable Connector, 2 Pins



## Pin Array and Specification

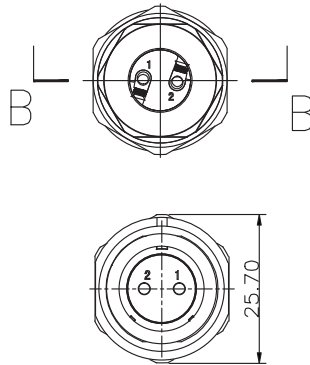

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

### Part Number: INT13-DP1711/S03L DP17 Series In-Line Cable Connector, 3 Pins



## Pin Array and Specification

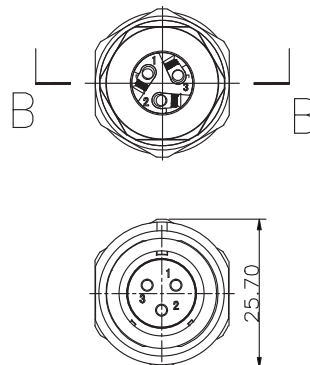

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

**Part Number: INT13-DP1711/S04L DP17 Series In-Line Cable Connector, 4 Pins**



**Pin Array and Specification**

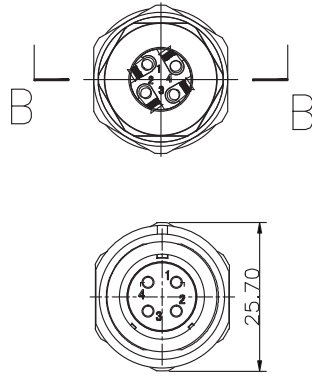

<b>Number of contacts</b>	<b>4</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0 * 4</b>
<b>Contact</b>	<b>Solder/Crimp</b>
<b>Rated voltage (AC. V)</b>	<b>500V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;0.785/18</b>

**Part Number: INT13-DP1711/S05L DP17 Series In-Line Cable Connector, 5 Pins**

**Pin Array and Specification**

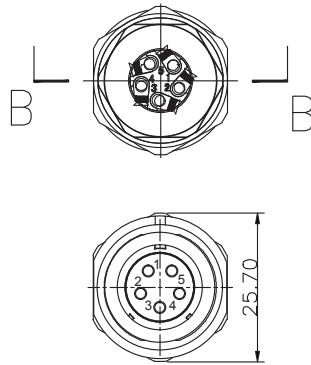



<b>Number of contacts</b>	<b>5</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0 * 5</b>
<b>Contact</b>	<b>Solder/Crimp</b>
<b>Rated voltage (AC. V)</b>	<b>500V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;0.785/18</b>

**INT13 - ZP17 Technical Characteristics**

**Part Number: INT13-ZP1712/S02L ZP17 Series Rear Mount Receptacle, 2 Pins**


**Pin Array and Specification**



<b>Number of contacts</b>	<b>2</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>10A</b>
<b>Contact diameter</b>	<b>1.5 * 2</b>
<b>Contact</b>	<b>Solder/Crimp</b>
<b>Rated voltage (AC. V)</b>	<b>500V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>2.5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;2/14</b>

# Part Number: INT13-ZP1712/S03L ZP17 Series Rear Mount Receptacle, 3 Pins


## Pin Array and Specification

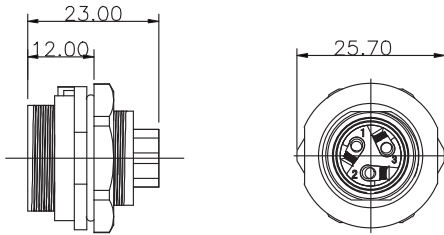

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-ZP1712/S04L ZP17 Series Rear Mount Receptacle, 4 Pins


## Pin Array and Specification

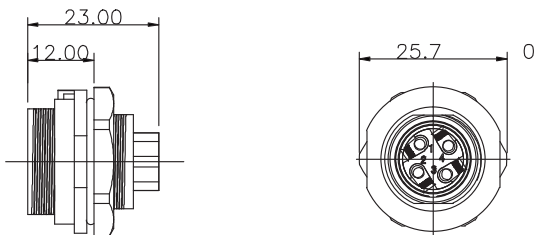

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-ZP1712/S05L ZP17 Series Rear Mount Receptacle, 5 Pins


## Pin Array and Specification

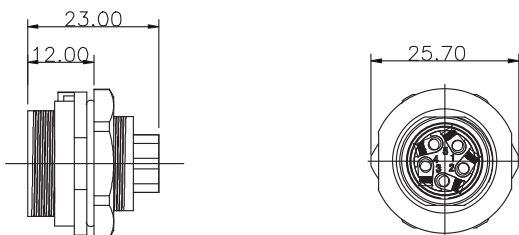

Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-FP1713/S02L FP17 Series 2-hole Flange Receptacle, 2 Pins


### Pin Array and Specification

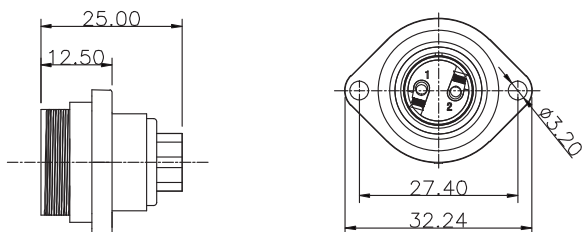

Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-FP1713/S03L FP17 Series 2-hole Flange Receptacle, 3 Pins


### Pin Array and Specification

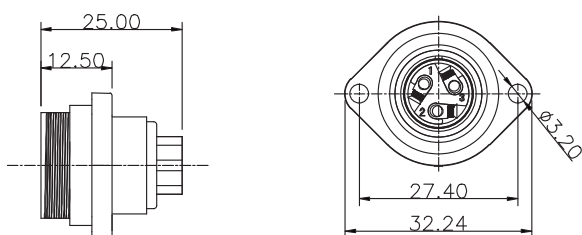

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-FP1713/S04L FP17 Series 2-hole Flange Receptacle, 4 Pins

### Pin Array and Specification

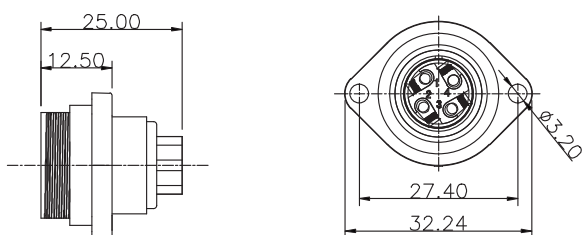



Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18



# Part Number: INT13-FP1713/S05L FP17 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

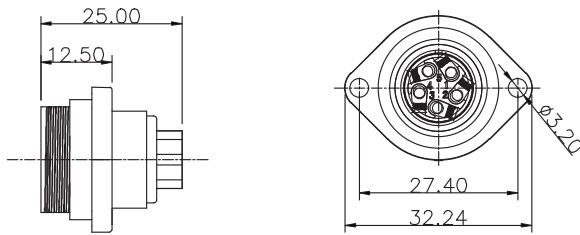


Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1714/S02L FP17 Series 4-hole Flange Receptacle, 2 Pins


## Pin Array and Specification

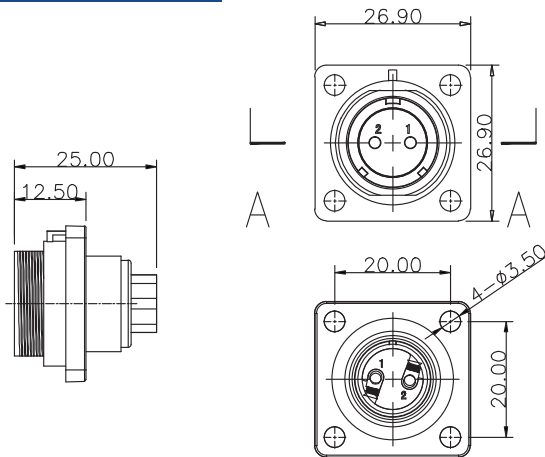


Number of contacts	2
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP1714/S03L FP17 Series 4-hole Flange Receptacle, 3 Pins



## Pin Array and Specification

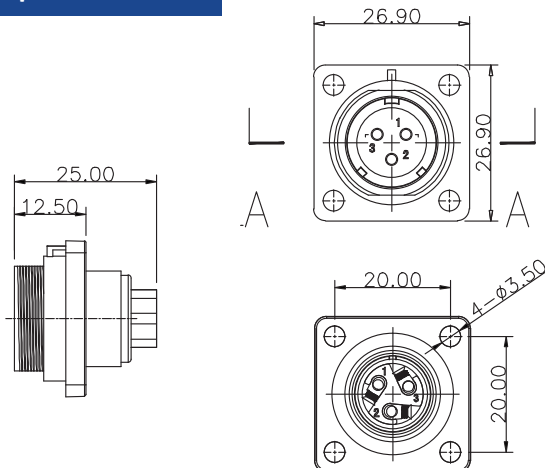

Number of contacts	3
Male contact face view	
Rated current (A)	10A
Contact diameter	1.5 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP1714/S04L FP17 Series 4-hole Flange Receptacle, 4 Pins



## Pin Array and Specification

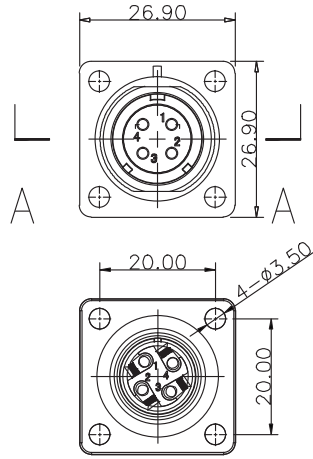

Number of contacts	4
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP1714/S05L FP17 Series 4-hole Flange Receptacle, 5 Pins

## Pin Array and Specification

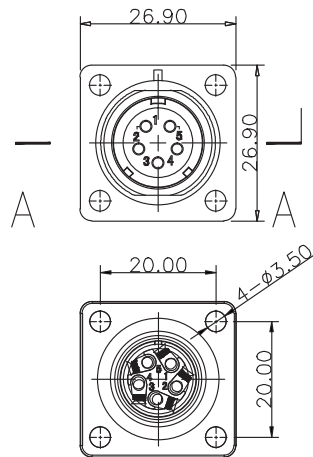













Number of contacts	5
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18



## INT13 - TP21 DP21 ZP21 FP21 Series Solder Type


- INT13 - TP21 DP21 ZP21 FP21 Series Technical Characteristics
- INT13 - TP21 Technical Characteristics
- INT13 - DP21 Technical Characteristics
- INT13 - ZP21 Technical Characteristics
- INT13 - FP21 Technical Characteristics

## INT13-TP21 DP21 ZP21 FP21 Series Technical Characteristics

Number of contacts	2	3	4	5	5	5	6	6	6	7	9	12
Male contact face view												
Rated current(A)	30A	30A	30A	30A	5A/30A	15A	15A	30A/5A	30A/5A	15A	5A	5A
Contact diameter	2.8*2	2.8*3	2.8*4	2.8*5	2.8*2 1.0*3	1.8*5	1.8*6	2.8*4 1.0*2	2.8*2 1.0*4	1.8* 7	1.0* 9	1.0* 12
Contact	Solder / Crimp				Solder	Solder/ Crimp	Solder					
Rated voltage (AC. V)	500	500	500	500	500	500	500	500V/ 400V	500V/ 400V	500	400	400
Test voltage (AC. V)1min	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
Contact resistance mΩ	1	1	1	1	5/1	2.5	2.5	1/5	0.5/5	2.5	5	5
Wire size for screw crimp m <sup>2</sup> / AWG	<4.17/11	<4.17/11	<4.17/11	<4.17/11	<0.785/18 <4.17/11	<2/14	<2/14	<0.785/18 <4.17/11	<10/7 <0.785/18	<2/14	<0.785/18	<0.785/18

## Part Number: INT13-TP2110/P02 TP21 Series Straight Plug, 2 Pins


### Pin Array and Specification

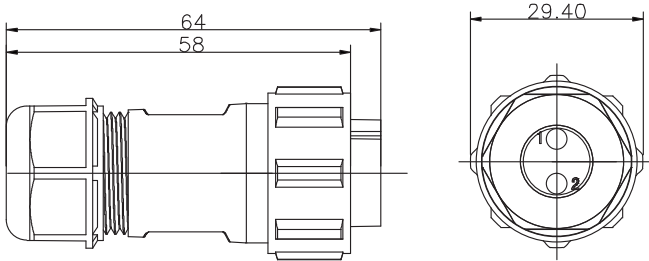

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-TP2110/P03 TP21 Series Straight Plug, 3 Pins


### Pin Array and Specification

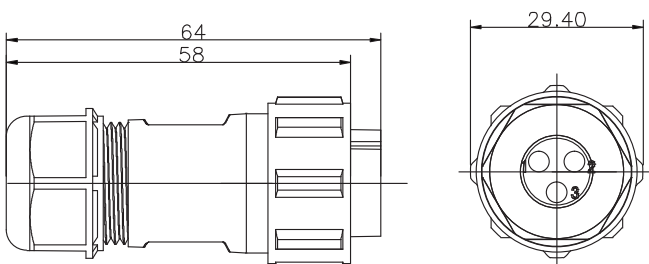

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-TP2110/P04 TP21 Series Straight Plug, 4 Pins


### Pin Array and Specification

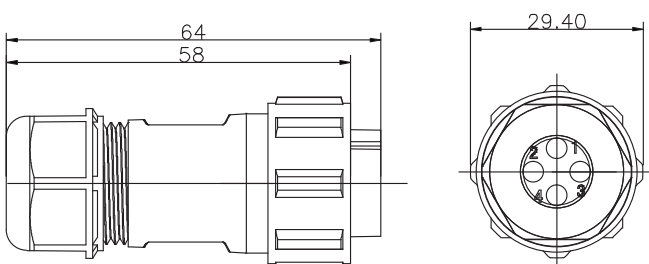

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-TP2110/P051 TP21 Series Straight Plug, 5 Pins


### Pin Array and Specification

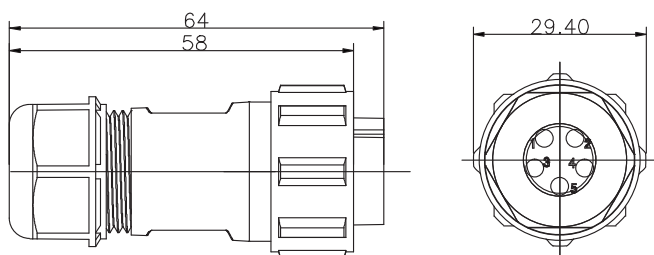

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-TP2110/P052 TP21 Series Straight Plug, 5 Pins


### Pin Array and Specification

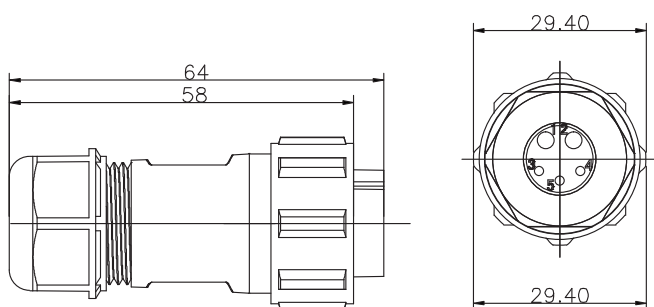

Number of contacts	5
Male contact face view	
Rated current (A)	5A/30A
Contact diameter	2.8*2 1.0*3
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5/1MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

## Part Number: INT13-TP2110/P053 TP21 Series Straight Plug, 5 Pins


### Pin Array and Specification

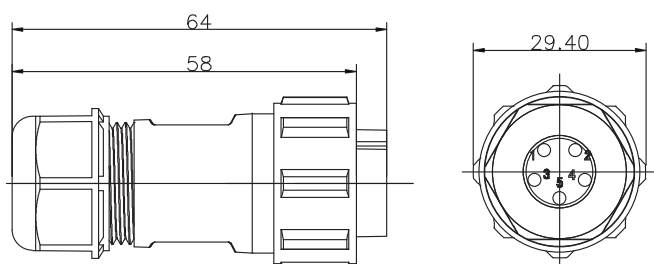


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-TP2110/P061 TP21 Series Straight Plug, 6 Pins


## Pin Array and Specification

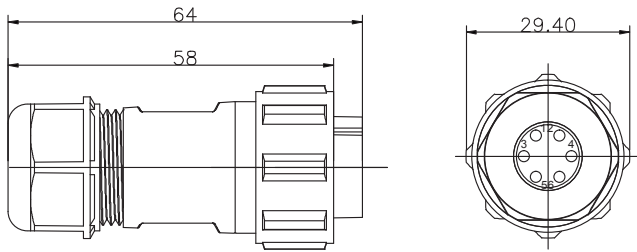


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 6
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-TP2110/P062 TP21 Series Straight Plug, 6 Pins


## Pin Array and Specification

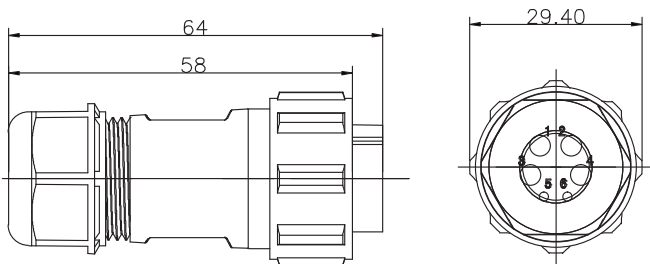


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*4 1.0*2
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

# Part Number: INT13-TP2110/P063 TP21 Series Straight Plug, 6 Pins


## Pin Array and Specification

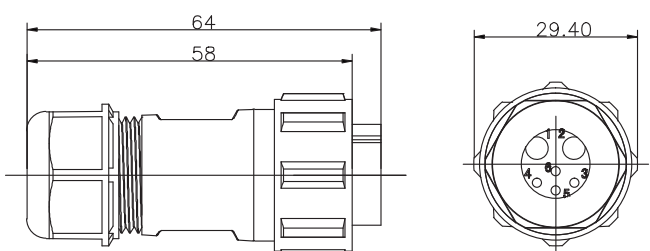


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*2 1.0*4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	0.5/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<10/7 <0.785/18

## Part Number: INT13-TP2110/P07 TP21 Series Straight Plug, 7 Pins


### Pin Array and Specification

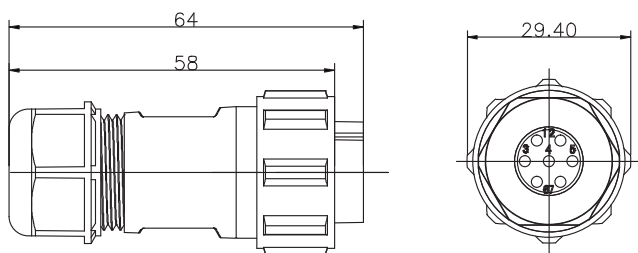


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 7
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP2110/P09 TP21 Series Straight Plug, 9 Pins


### Pin Array and Specification

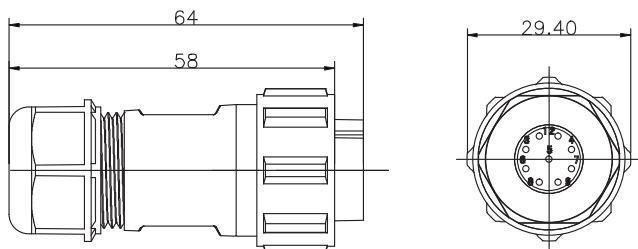


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-TP2110/P12 TP21 Series Straight Plug, 12 Pins

### Pin Array and Specification

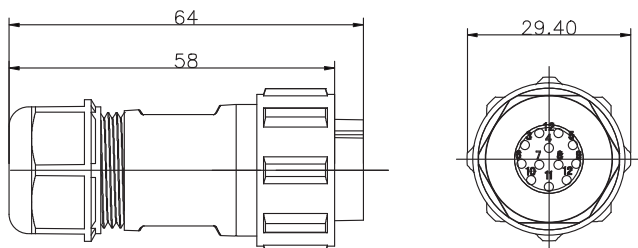


Number of contacts	12
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 12
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18



## Part Number: INT13-DP2111/S02 DP21 Series In-Line Cable Connector, 2 Pins


### Pin Array and Specification

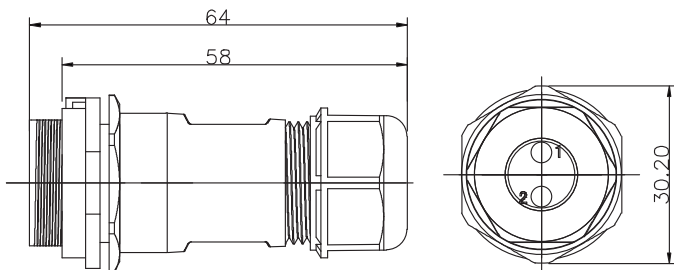

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-DP2111/S03 DP21 Series In-Line Cable Connector, 3 Pins


### Pin Array and Specification

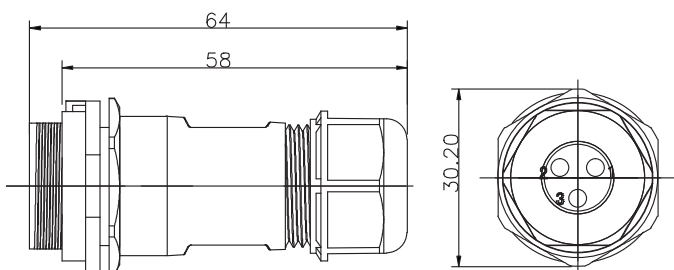

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-DP2111/S04 DP21 Series In-Line Cable Connector, 4 Pins


### Pin Array and Specification

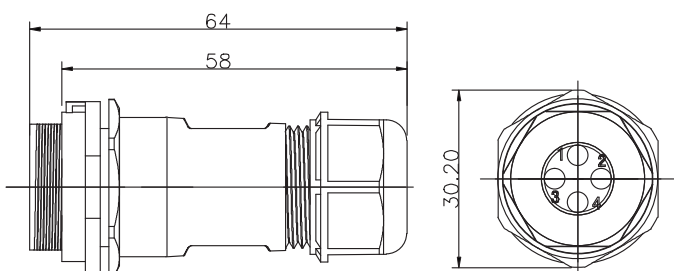

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8* 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-DP2111/S051 DP21 Series In-Line Cable Connector, 5 Pins


## Pin Array and Specification

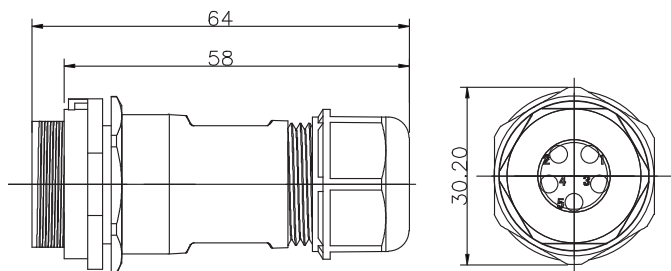

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-DP2111/S052 DP21 Series In-Line Cable Connector, 5 Pins


## Pin Array and Specification

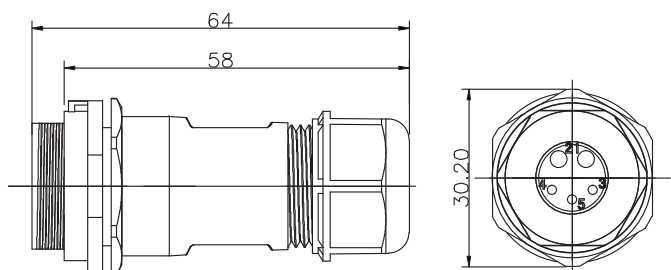

Number of contacts	5
Male contact face view	
Rated current (A)	5A/30A
Contact diameter	2.8*2 1.0*3
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5/1MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

# Part Number: INT13-DP2111/S053 DP21 Series In-Line Cable Connector, 5 Pins


## Pin Array and Specification

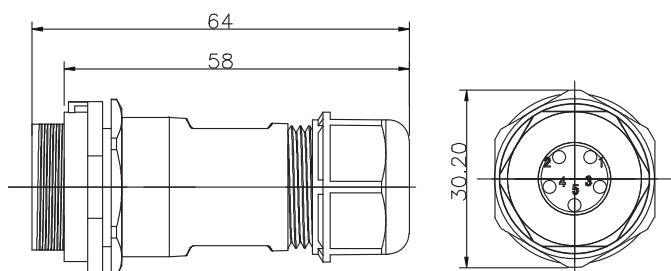


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8* 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-DP2111/S061 DP21 Series In-Line Cable Connector, 6 Pins


### Pin Array and Specification

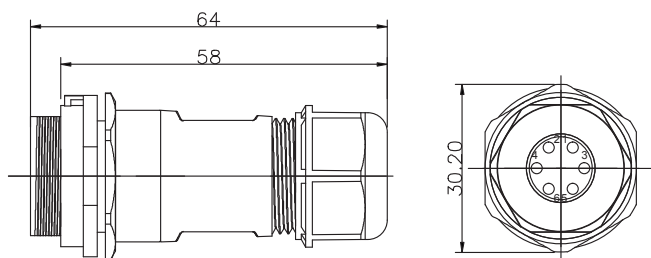


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 6
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-DP2111/S062 DP21 Series In-Line Cable Connector, 6 Pins


### Pin Array and Specification

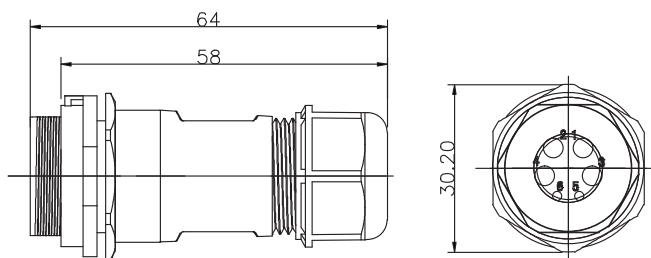


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*4 1.0*2
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

## Part Number: INT13-DP2111/S063 DP21 Series In-Line Cable Connector, 6 Pins


### Pin Array and Specification

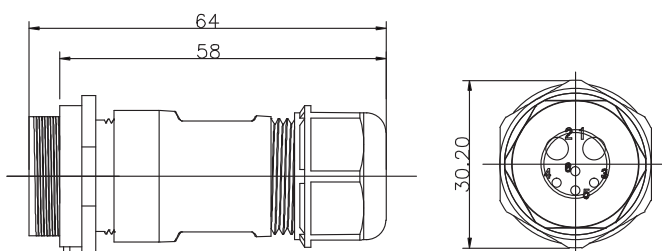


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*2 1.0*4
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	0.5/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<10/7 <0.785/18

# Part Number: INT13-DP2111/S07 DP21 Series In-Line Cable Connector, 7 Pins


## Pin Array and Specification

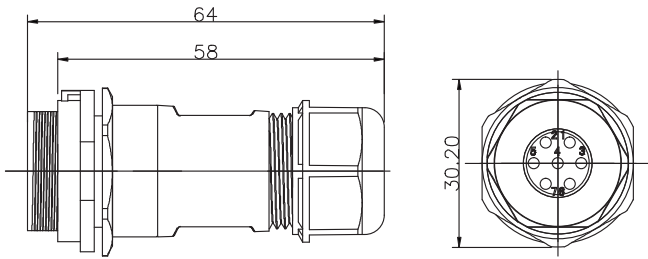


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 7
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-DP2111/S09 DP21 Series In-Line Cable Connector, 9 Pins


## Pin Array and Specification

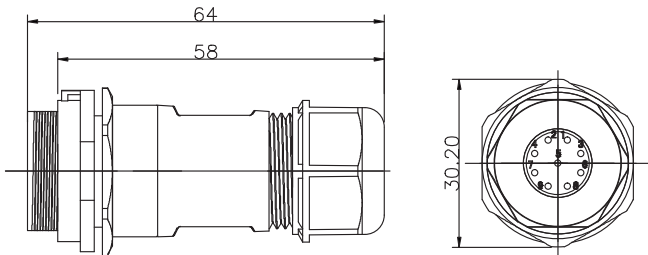


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-DP2111/S012 DP21 Series In-Line Cable Connector, 12 Pins


## Pin Array and Specification

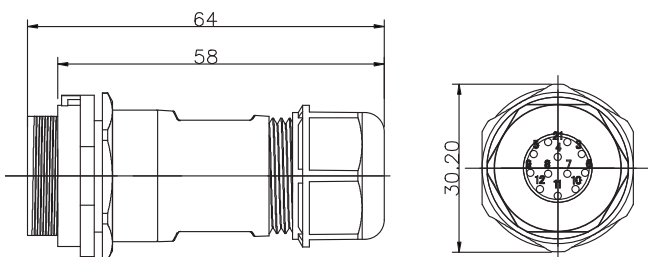

Number of contacts	12
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0* 12
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## Part Number: INT13-ZP2112/S02 ZP21 Series Rear Mount Receptacle, 2 Pins


### Pin Array and Specification

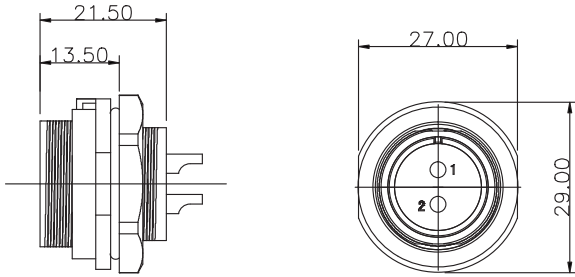

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-ZP2112/S03 ZP21 Series Rear Mount Receptacle, 3 Pins


### Pin Array and Specification

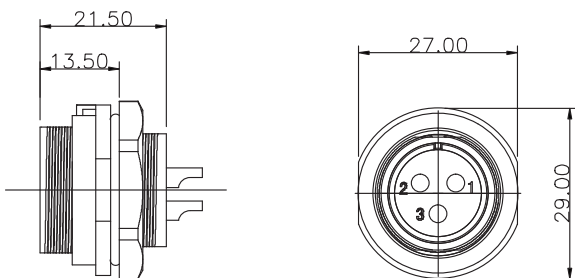

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-ZP2112/S04 ZP21 Series Rear Mount Receptacle, 4 Pins


### Pin Array and Specification

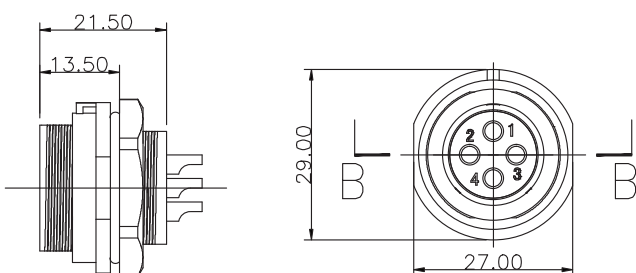


Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8* 4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-ZP2112/S051 ZP21 Series Rear Mount Receptacle, 5 Pins


## Pin Array and Specification

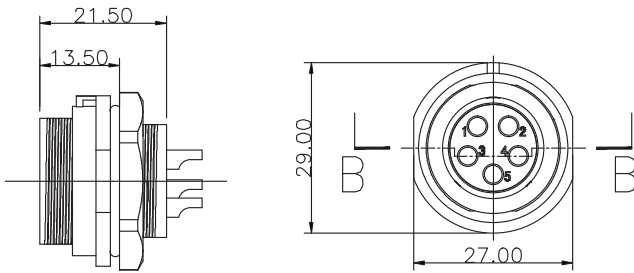


Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8 * 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-ZP2112/S052 ZP21 Series Rear Mount Receptacle, 5 Pins


## Pin Array and Specification

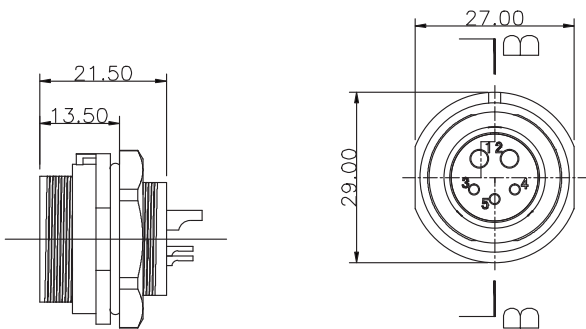


Number of contacts	5
Male contact face view	
Rated current (A)	5A/30A
Contact diameter	2.8*2 1.0*3
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5/1MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 ≤4.17/11

# Part Number: INT13-ZP2112/S053 ZP21 Series Rear Mount Receptacle, 5 Pins


## Pin Array and Specification

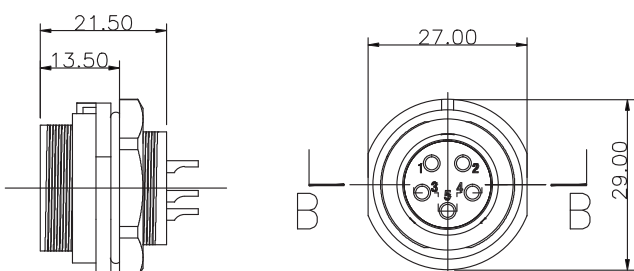

Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8* 5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-ZP2112/S061 ZP21 Series Rear Mount Receptacle, 6 Pins


## Pin Array and Specification

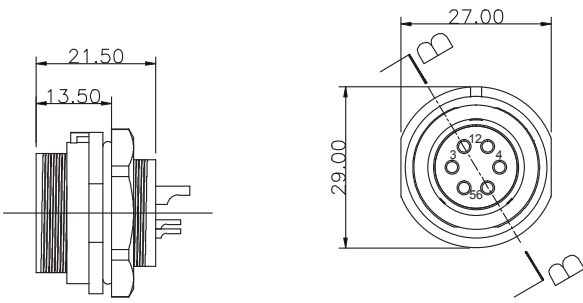

Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 6
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-ZP2112/S062 ZP21 Series Rear Mount Receptacle, 6 Pins


## Pin Array and Specification

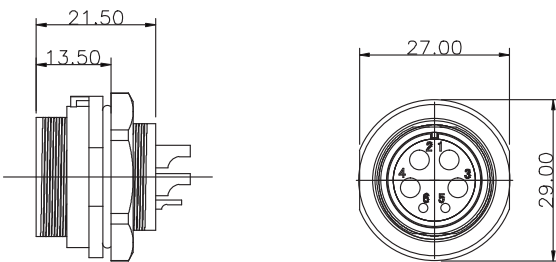

Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*4 1.0*2
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

# Part Number: INT13-ZP2112/S063 ZP21 Series Rear Mount Receptacle, 6 Pins


## Pin Array and Specification

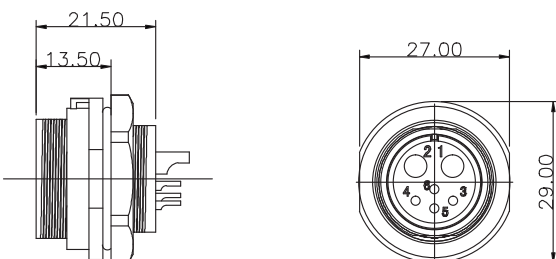


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*2 1.0*4
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	0.5/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<10/7 <0.785/18

# Part Number: INT13-ZP2112/S07 ZP21 Series Rear Mount Receptacle, 7 Pins


## Pin Array and spec specification

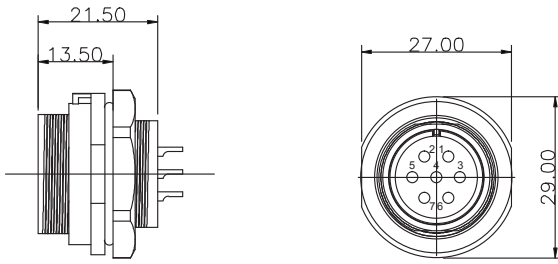


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 7
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-ZP2112/S09 ZP21 Series Rear Mount Receptacle, 9 Pins


## Pin Array and Specification

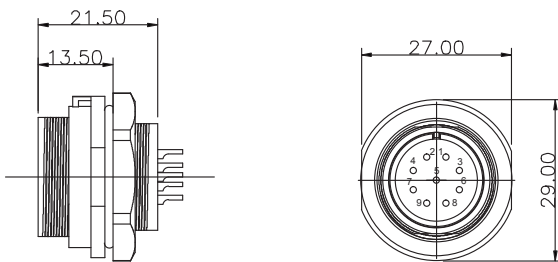


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-ZP2112/S012 ZP21 Series Rear Mount Receptacle, 12 Pins

## Pin Array and Specification

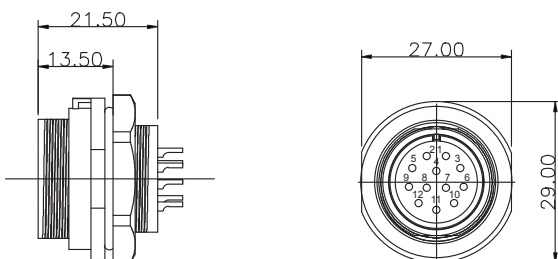


Number of contacts	12
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 12
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18



## Part Number: INT13-FP2113/S02 FP21 Series 2-hole Flange Receptacle, 2 Pins


### Pin Array and spec specification

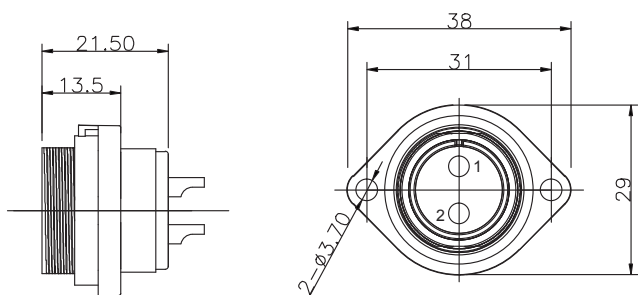

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-FP2113/S03 FP21 Series 2-hole Flange Receptacle, 3 Pins


### Pin Array and Specification

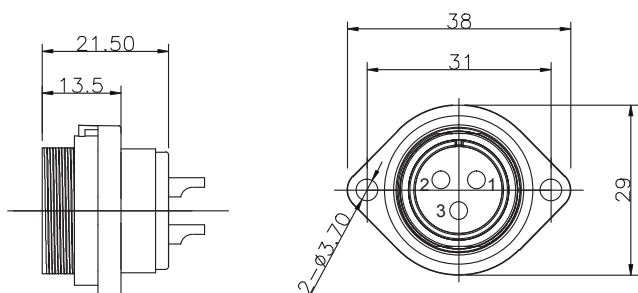

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

## Part Number: INT13-FP2113/S04 FP21 Series 2-hole Flange Receptacle, 4 Pins


### Pin Array and Specification

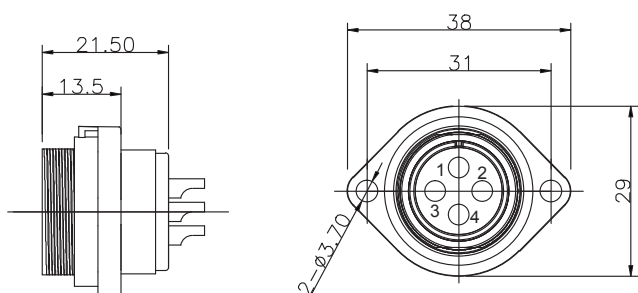

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2113/S051 FP21 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and spec specification

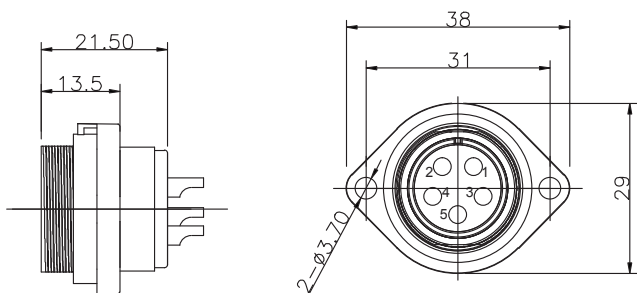

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2113/S052 FP21 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

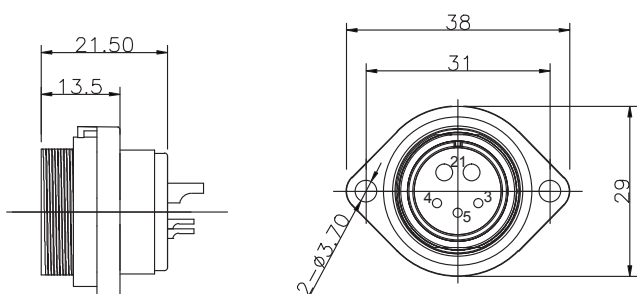

Number of contacts	5
Male contact face view	
Rated current (A)	5A/30A
Contact diameter	2.8*2 1.0*3
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5/1MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11


# Part Number: INT13-FP2113/S053 FP21 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

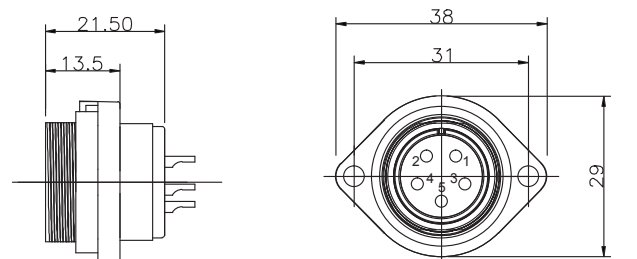


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14


Pin Array and spec specification

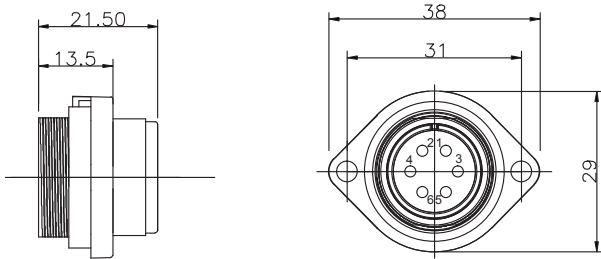


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14


Pin Array and Specification

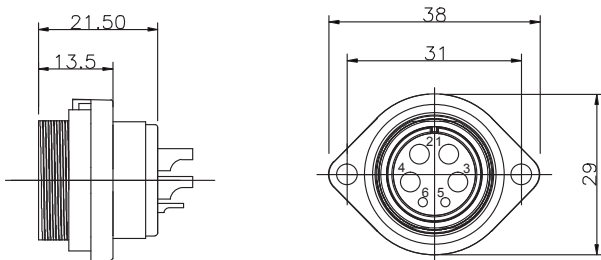

Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*4 1.0*2
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11


Pin Array and Specification

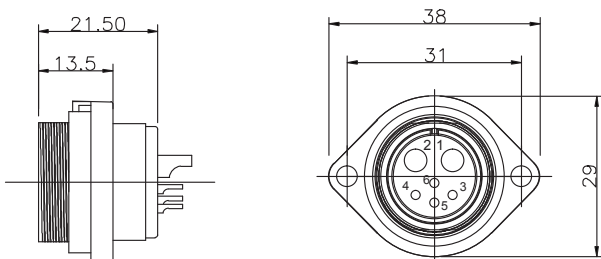


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*2 1.0*4
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	0.5/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<10/7 <0.785/18

# Part Number: INT13-FP2113/S07 FP21 Series 2-hole Flange Receptacle, 7 Pins


## Pin Array and spec specification

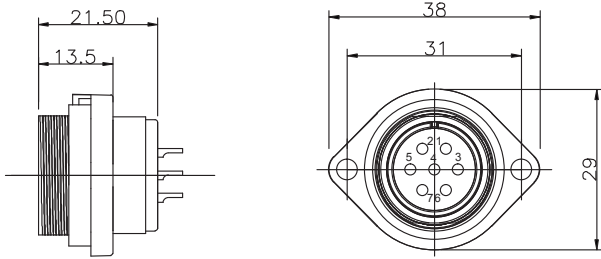


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*7
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2113/S09 FP21 Series 2-hole Flange Receptacle, 9 Pins


## Pin Array and Specification

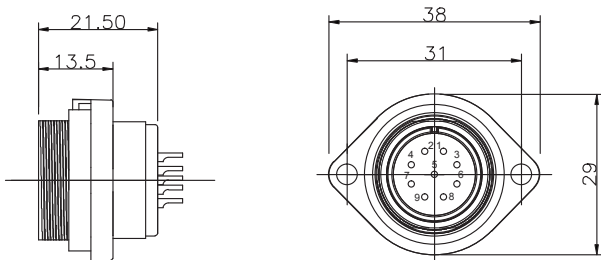


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP2113/S012 FP21 Series 2-hole Flange Receptacle, 12 Pins



## Pin Array and Specification

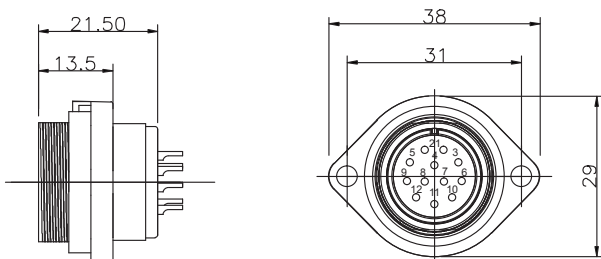

Number of contacts	12
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*12
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP2114/S02 FP21 Series 4-hole Flange Receptacle, 2 Pins



## Pin Array and spec specification

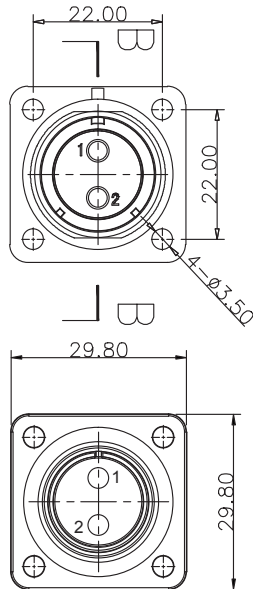

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2114/S03 FP21 Series 4-hole Flange Receptacle, 3 Pins



## Pin Array and Specification

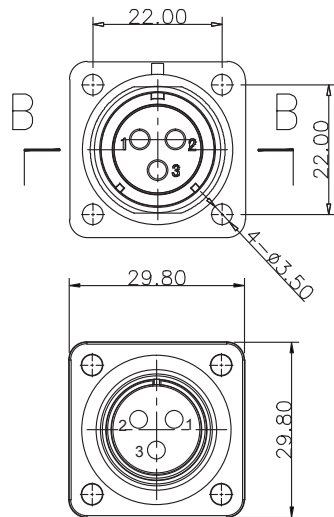

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2114/S04 FP21 Series 4-hole Flange Receptacle, 4 Pins


## Pin Array and Specification

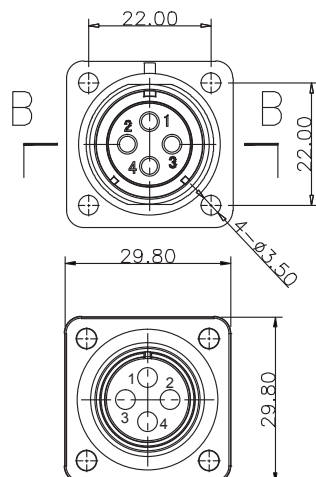

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2114/S051 FP21 Series 4-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

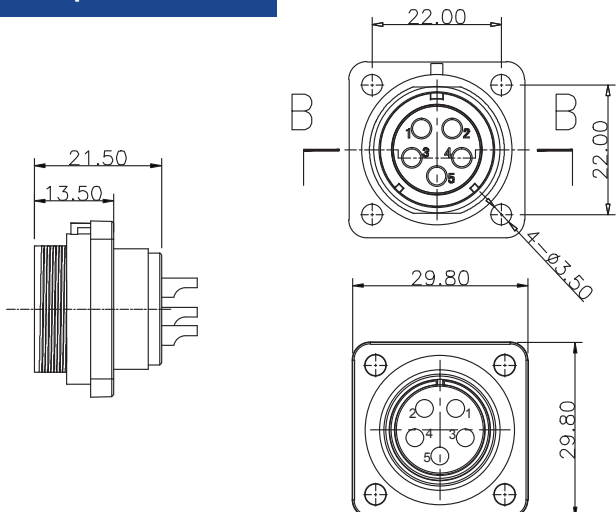

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

# Part Number: INT13-FP2114/S052 FP21 Series 4-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

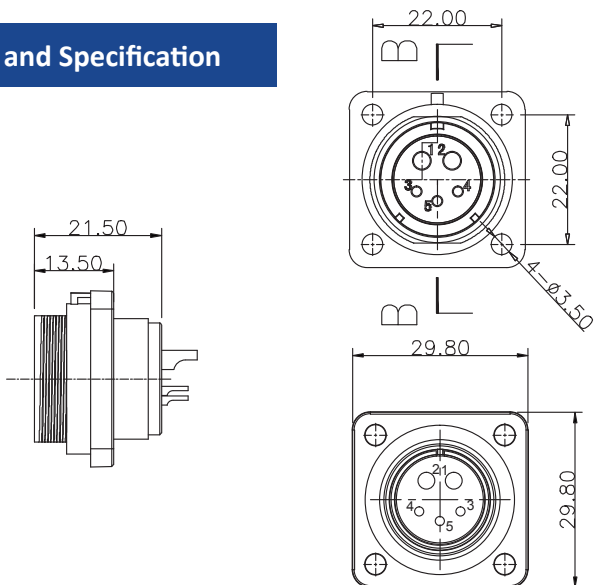

Number of contacts	5
Male contact face view	
Rated current (A)	5A/30A
Contact diameter	2.8*2 1.0*3
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5/1MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

# Part Number: INT13-FP2114/S053 FP21 Series 4-hole Flange Receptacle, 5 Pins



## Pin Array and spec specification

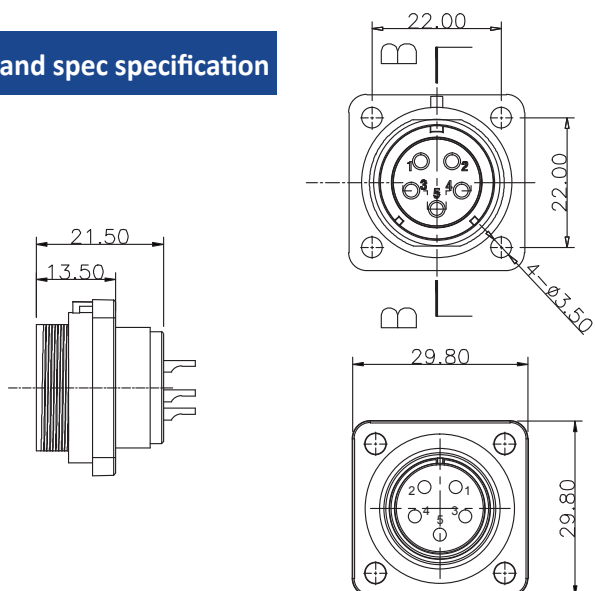

Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2114/S061 FP21 Series 4-hole Flange Receptacle, 6 Pins



## Pin Array and Specification

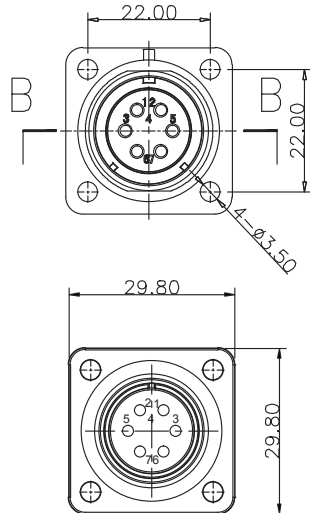

Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2114/S062 FP21 Series 4-hole Flange Receptacle, 6 Pins



## Pin Array and Specification

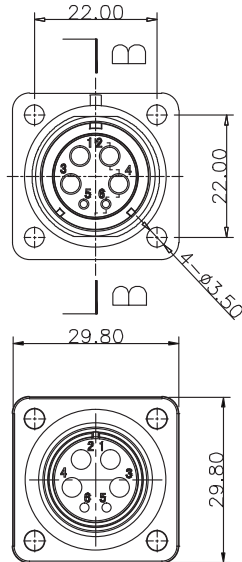

Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*4 1.0*2
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18 <4.17/11

# Part Number: INT13-FP2114/S063 FP21 Series 4-hole Flange Receptacle, 6 Pins



## Pin Array and spec specification

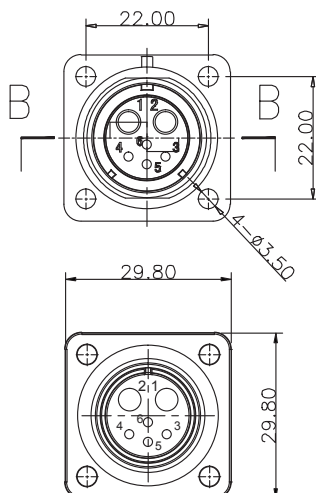


Number of contacts	6
Male contact face view	
Rated current (A)	30A/5A
Contact diameter	2.8*2 1.0*4
Contact	Solder
Rated voltage (AC. V)	500V/400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	0.5/5MΩ
Wire size solder mm <sup>2</sup> /AWG	<10/7 <0.785/18

# Part Number: INT13-FP2114/S07 FP21 Series 4-hole Flange Receptacle, 7 Pins



## Pin Array and Specification

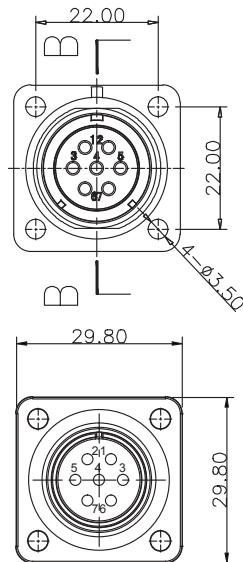


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*7
Contact	Solder
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2114/S09 FP21 Series 4-hole Flange Receptacle, 9 Pins



## Pin Array and Specification

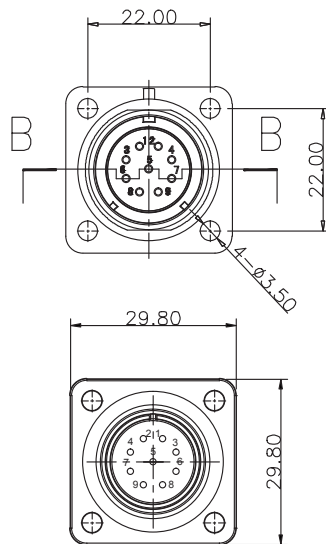


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP2114/S012 FP21 Series 4-hole Flange Receptacle, 12 Pins

## Pin Array and spec specification

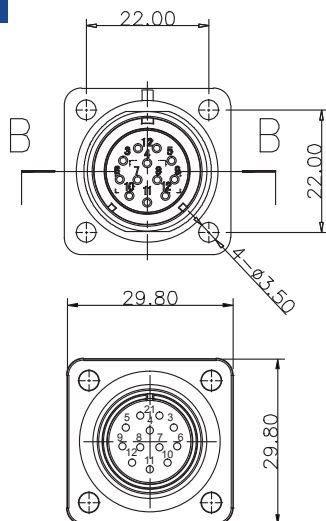

Number of contacts	12
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*12
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18






## INT13 - TP21 DP21 ZP21 FP21 Series Screw Type

- INT13 - TP21 Technical Characteristics
- INT13 - DP21 Technical Characteristics
- INT13 - ZP21 Technical Characteristics
- INT13 - FP21 Technical Characteristics

## Part Number: INT13-TP2110/P02L TP21 Series Straight Plug, 2 Pins


### Pin Array and Specification

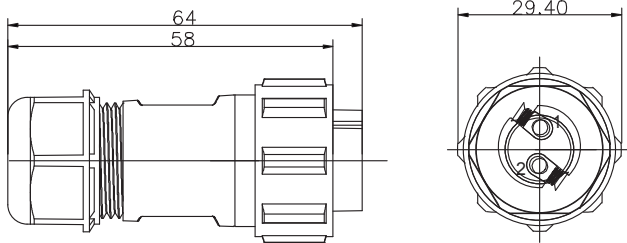

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-TP2110/P03L TP21 Series Straight Plug, 3 Pins


### Pin Array and Specification

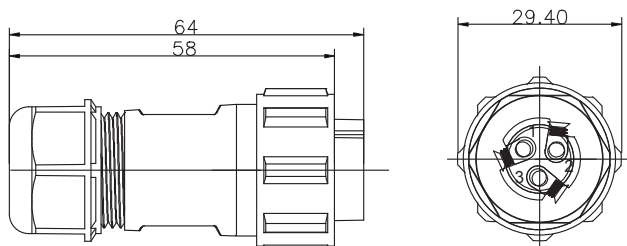

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-TP2110/P04L TP21 Series Straight Plug, 4 Pins


### Pin Array and spec specification

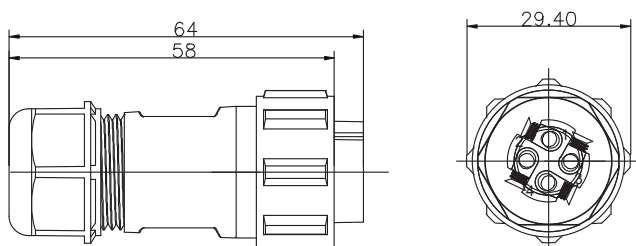


Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

**Part Number: INT13-TP2110/P051L TP21 Series Straight Plug, 5 Pins**


**Pin Array and Specification**

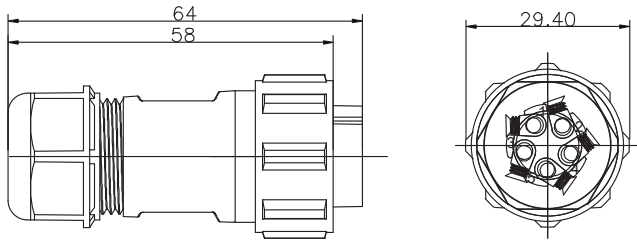


Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

**Part Number: INT13-TP2110/P053L TP21 Series Straight Plug, 5 Pins**


**Pin Array and Specification**

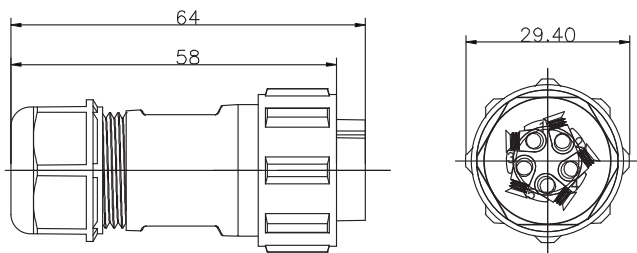


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

**Part Number: INT13-TP2110/P06L TP21 Series Straight Plug, 6 Pins**


**Pin Array and spec specification**

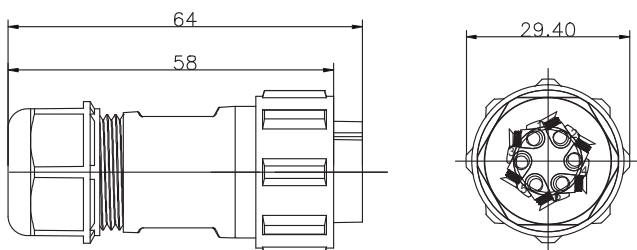


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP2110/P07L TP21 Series Straight Plug, 7 Pins


### Pin Array and Specification

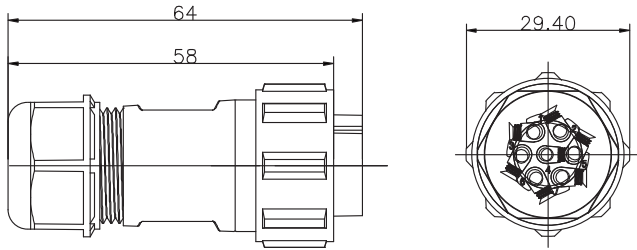


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*7
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

## Part Number: INT13-TP2110/P09L TP21 Series Straight Plug, 9 Pins

### Pin Array and Specification

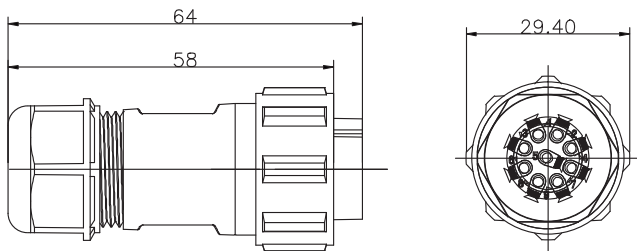



Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

## INT13 - DP21 Technical Characteristics

## Part Number: INT13-DP2111/S02L DP21 Series In-Line Cable Connector, 2 Pins


### Pin Array and spec specification

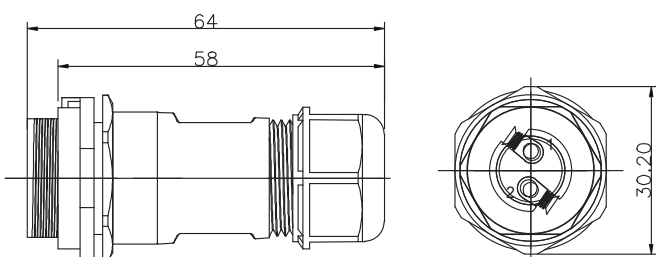

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-DP2111/S03L DP21 Series In-Line Cable Connector, 3 Pins


### Pin Array and Specification

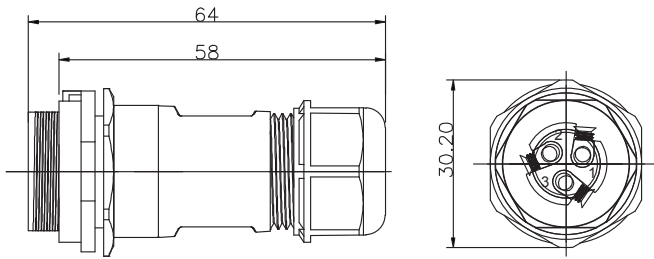

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-DP2111/S04L DP21 Series In-Line Cable Connector, 4 Pins


### Pin Array and Specification

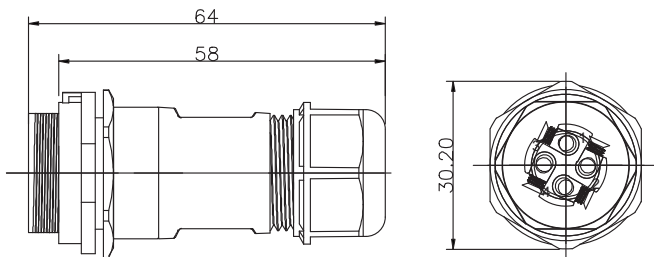

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15


## Part Number: INT13-DP2111/S051L DP21 Series In-Line Cable Connector, 5 Pins

### Pin Array and spec specification

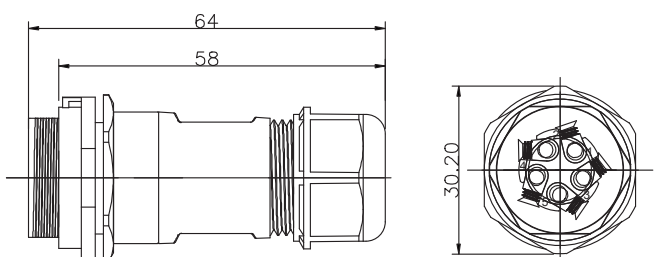


Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

Pin Array and Specification

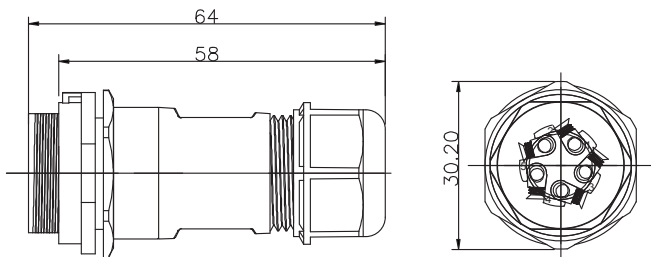


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

Pin Array and Specification

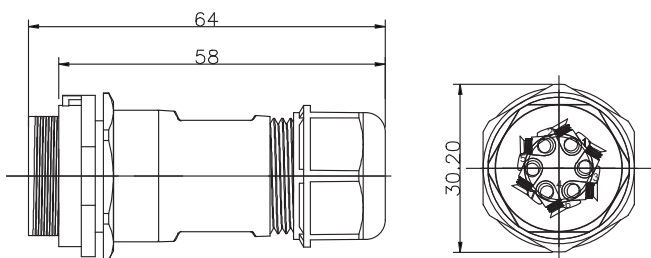


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

Pin Array and spec specification

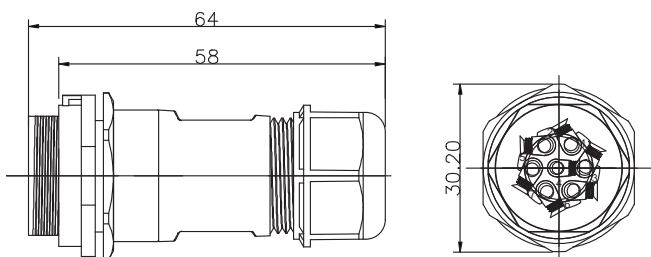

Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*7
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

Pin Array and Specification

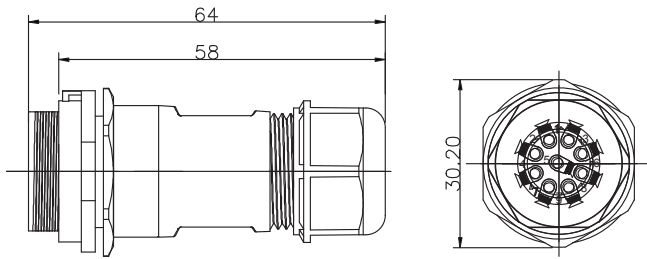


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

INT13 - ZP21 Technical Characteristics

Part Number: INT13-ZP2112/S02L ZP21 Series Rear Mount Receptacle, 2 Pins


Pin Array and Specification

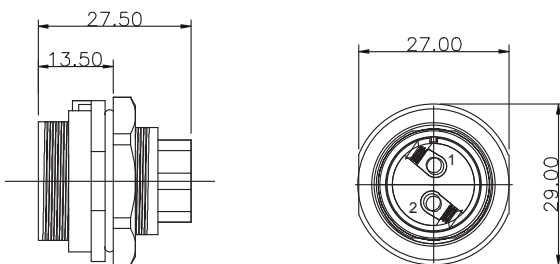

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11

Part Number: INT13-ZP2112/S03L ZP21 Series Rear Mount Receptacle, 3 Pins


Pin Array and spec specification

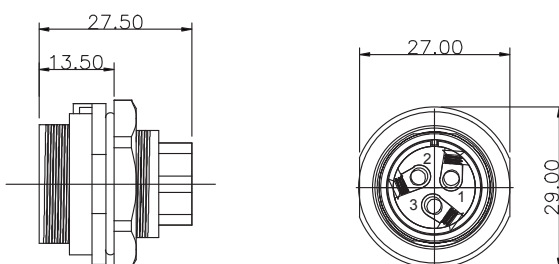


Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-ZP2112/S04L ZP21 Series Rear Mount Receptacle, 4 Pins


## Pin Array and Specification

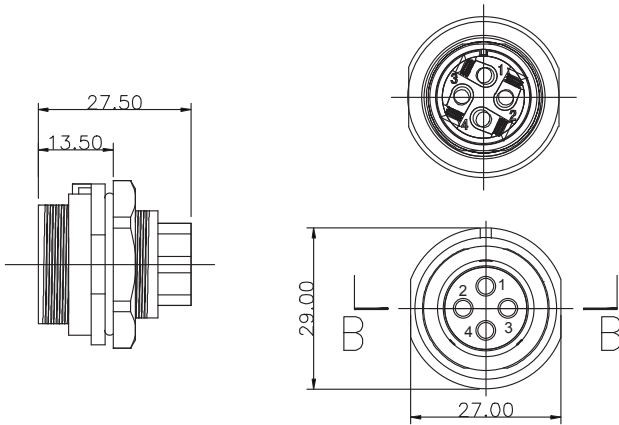


Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*4
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-ZP2112/S051L ZP21 Series Rear Mount Receptacle, 5 Pins


## Pin Array and Specification

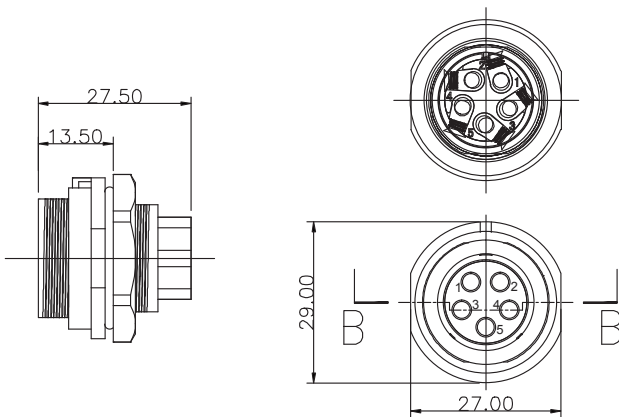


Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-ZP2112/S053L ZP21 Series Rear Mount Receptacle, 5 Pins

## Pin Array and spec specification

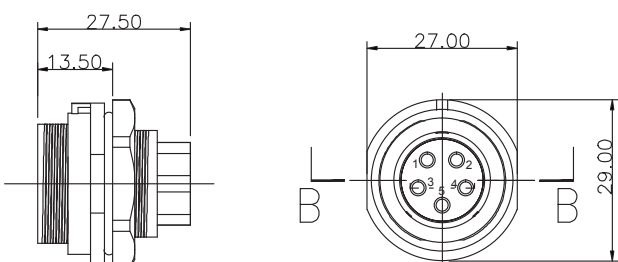


Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14



**Part Number: INT13-ZP2112/S06L ZP21 Series Rear Mount Receptacle, 6 Pins**


**Pin Array and Specification**

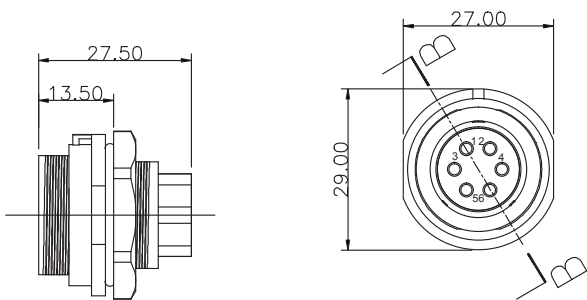

<b>Number of contacts</b>	<b>6</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>15A</b>
<b>Contact diameter</b>	<b>1.8*6</b>
<b>Contact</b>	<b>Solder/Crimp</b>
<b>Rated voltage (AC. V)</b>	<b>500V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>2.5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;2/14</b>

**Part Number: INT13-ZP2112/S07L ZP21 Series Rear Mount Receptacle, 7 Pins**


**Pin Array and Specification**

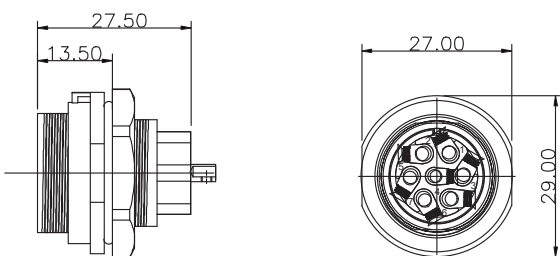

<b>Number of contacts</b>	<b>7</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>15A</b>
<b>Contact diameter</b>	<b>1.8*7</b>
<b>Contact</b>	<b>Solder/Crimp</b>
<b>Rated voltage (AC. V)</b>	<b>500V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>2.5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;2/14</b>

**Part Number: INT13-ZP2112/S09L ZP21 Series Rear Mount Receptacle, 9 Pins**


**Pin Array and spec specification**

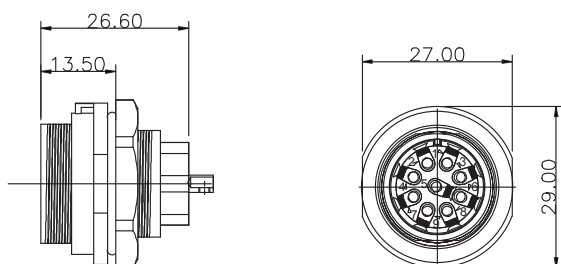

<b>Number of contacts</b>	<b>9</b>
<b>Male contact face view</b>	
<b>Rated current (A)</b>	<b>5A</b>
<b>Contact diameter</b>	<b>1.0*9</b>
<b>Contact</b>	<b>Solder</b>
<b>Rated voltage (AC. V)</b>	<b>400V</b>
<b>Test voltage (AC. V) 1 min</b>	<b>1500V</b>
<b>Contact resistance</b>	<b>5MΩ</b>
<b>Wire size solder mm<sup>2</sup> /AWG</b>	<b>&lt;0.785/18</b>

## Part Number: INT13-FP2113/S02L FP21 Series 2-hole Flange Receptacle, 2 Pins


### Pin Array and Specification

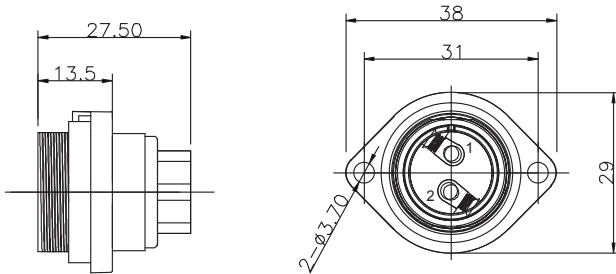

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-FP2113/S03L FP21 Series 2-hole Flange Receptacle, 3 Pins


### Pin Array and Specification

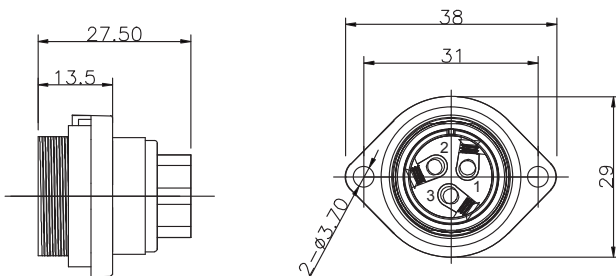

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

## Part Number: INT13-FP2113/S04L FP21 Series 2-hole Flange Receptacle, 4 Pins


### Pin Array and spec specification

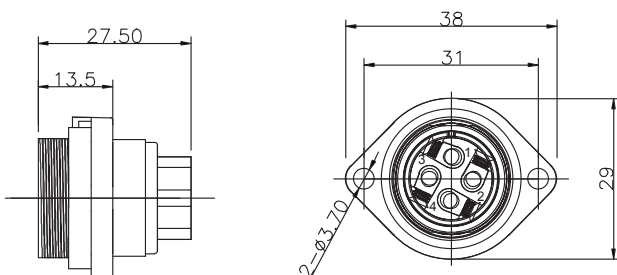

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2113/S051L FP21 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

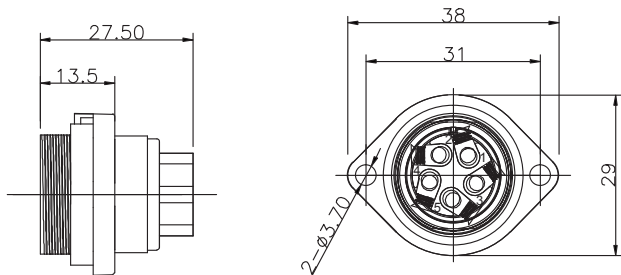

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2113/S053L FP21 Series 2-hole Flange Receptacle, 5 Pins


## Pin Array and Specification

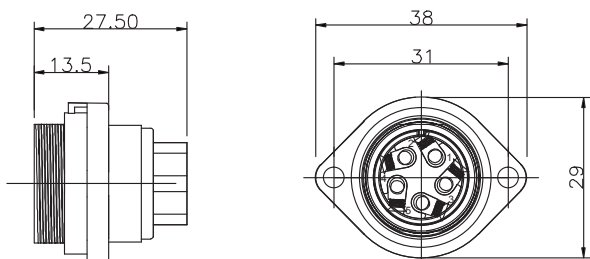

Number of contacts	5
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2113/S06L FP21 Series 2-hole Flange Receptacle, 6 Pins


## Pin Array and spec specification

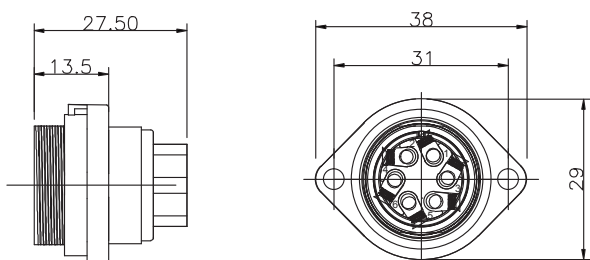


Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2113/S07L FP21 Series 2-hole Flange Receptacle, 7 Pins


## Pin Array and Specification

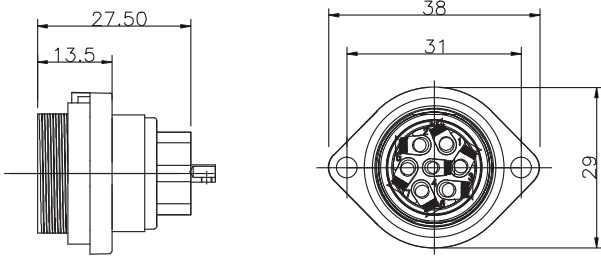


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*7
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2113/S09L FP21 Series 2-hole Flange Receptacle, 9 Pins


## Pin Array and Specification

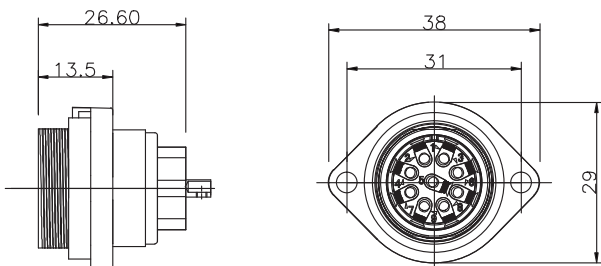


Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0*9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

# Part Number: INT13-FP2114/S02L FP21 Series 4-hole Flange Receptacle, 2 Pins


## Pin Array and spec specification

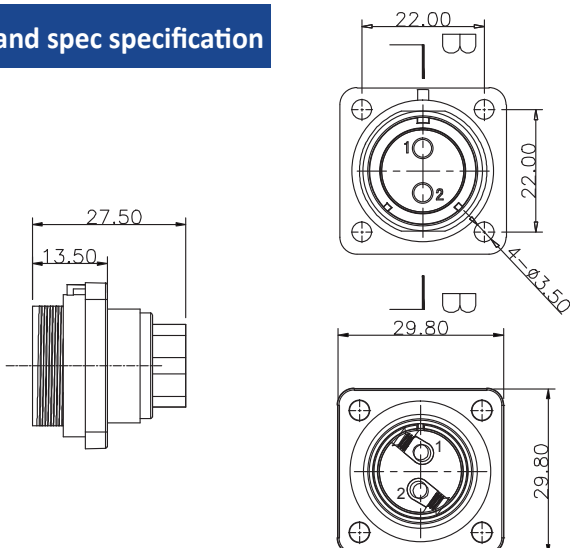

Number of contacts	2
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*2
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2114/S03L FP21 Series 4-hole Flange Receptacle, 3 Pins


## Pin Array and Specification

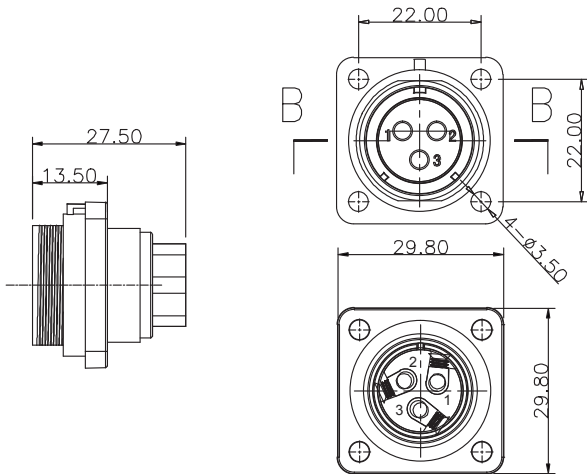

Number of contacts	3
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2114/S04L FP21 Series 4-hole Flange Receptacle, 4 Pins


## Pin Array and Specification

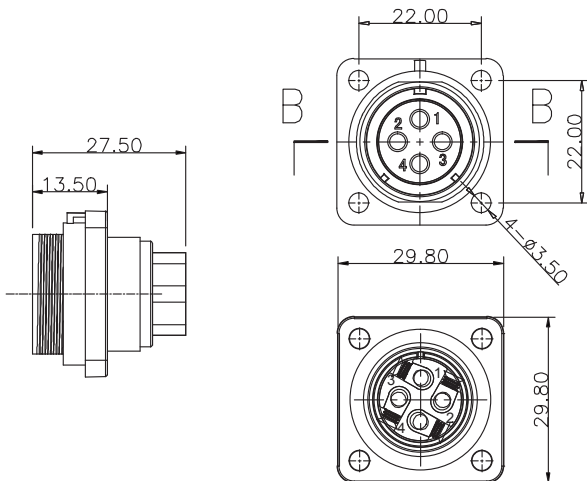

Number of contacts	4
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*3
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2114/S051L FP21 Series 4-hole Flange Receptacle, 5 Pins



## Pin Array and spec specification

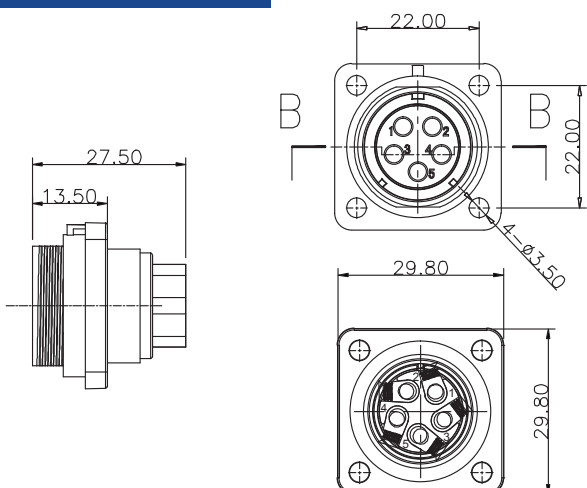

Number of contacts	5
Male contact face view	
Rated current (A)	30A
Contact diameter	2.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	1MΩ
Wire size solder mm <sup>2</sup> /AWG	<4.17/11
Wire size for screw ceimp mm <sup>2</sup> /AWG	<1.5/15

# Part Number: INT13-FP2114/S053L FP21 Series 4-hole Flange Receptacle, 5 Pins



## Pin Array and Specification

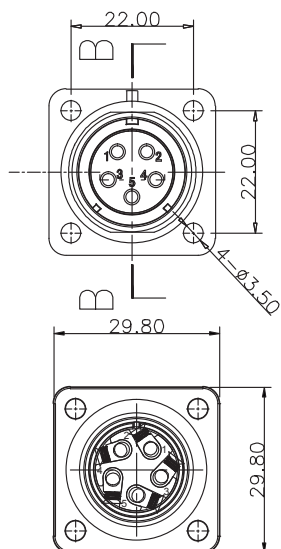

Number of contacts	5
Male contact face view	
Rated current (A)	1A
Contact diameter	1.8*5
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

# Part Number: INT13-FP2114/S06L FP21 Series 4-hole Flange Receptacle, 6 Pins



## Pin Array and Specification

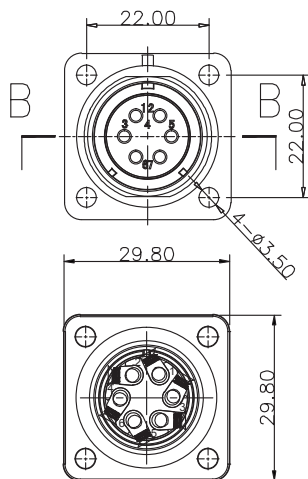

Number of contacts	6
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8*6
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14



# Part Number: INT13-FP2114/S07L FP21 Series 4-hole Flange Receptacle, 7 Pins


## Pin Array and spec specification

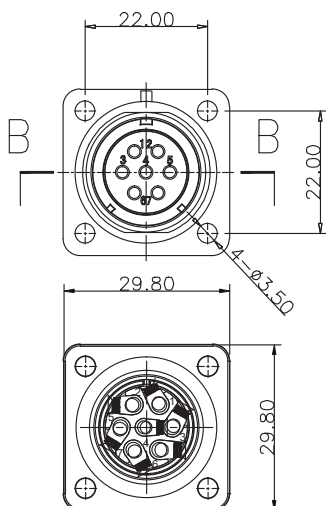


Number of contacts	7
Male contact face view	
Rated current (A)	15A
Contact diameter	1.8 * 7
Contact	Solder/Crimp
Rated voltage (AC. V)	500V
Test voltage (AC. V) 1 min	1500V
Contact resistance	2.5MΩ
Wire size solder mm <sup>2</sup> /AWG	<2/14

Pin Array and Specification

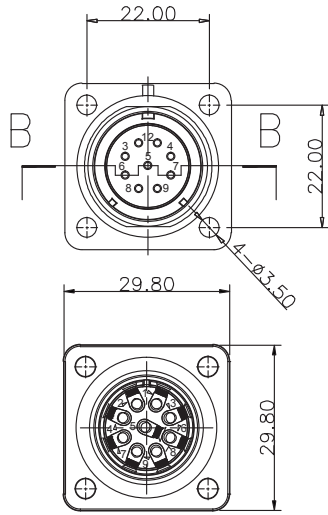

Number of contacts	9
Male contact face view	
Rated current (A)	5A
Contact diameter	1.0 * 9
Contact	Solder
Rated voltage (AC. V)	400V
Test voltage (AC. V) 1 min	1500V
Contact resistance	5MΩ
Wire size solder mm <sup>2</sup> /AWG	<0.785/18

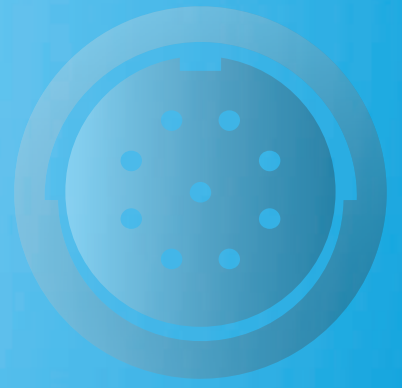

**INT13-WF Series Push Pull Connectors**





## WF Series Push Pull Fast Locking Connector

### Product Introduction

WF series aviation plug has the characteristics of high temperature resistance, water resistance, dust resistance, etc., They can work stably in harsh environments. With multi-size and multi-core options, it can be directly installed on the panel, compact and beautiful, and the connection form is push-in steel ball lock, quick and easy to insert and removal.



### Application

This connector is mainly used in avionics equipment, such as airplanes, helicopters, aircraft and so on. They can be used to connect various electronic devices such as radars, communications equipment, navigators, flight controllers, etc.



Navigator



Flight Controller




Radar

### Product Feature and Performance Details

Connector Type	Push Pull Fast Locking
Outer Shell Material	Brass Plated Chrome
Insulator	Thermoplastic PPS, high Temp. resistance 260°C
Configuration	Brass (gold plated)
Contact Type	Solder
Cable Diameter	INT13-WF6: 2-3mm, II 3-4mm(nonstandard) INT13-WF10: 3-4mm, II 4-6.5mm(nonstandard) INT13-WF12: 4-6.5mm(nonstandard), II 5-8mm
IP Rating	IP67
Enduranc	500
Temperature Range	-40°C~+85°C
Insulation Resistance	2000MΩ

## Part Numbering System

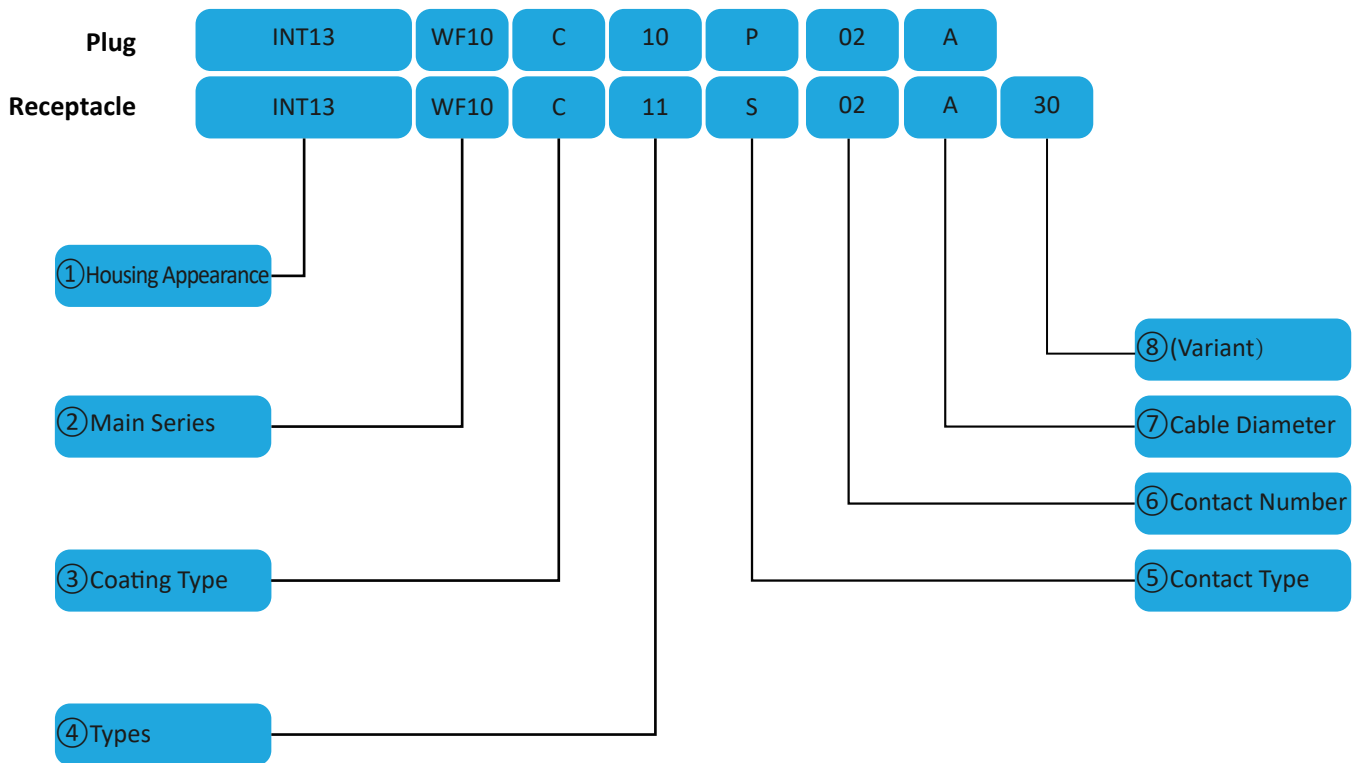

\*Note :

- ① Appearance: ITN12, INT13..... indicate different appearance of connection rings
- ② Main series of the product: INT13-WF6, INT13-WF10, INT13-WF12.....
- ③ Coating type: C = Pearl chrome, S = Black chrome
- ④ Types: 10 = Plug, 11 = Cable mounted receptacle, 12 = Rear nut receptacle, 13 = Square flange receptacle, 14 = Right angle plug.....
- ⑤ Contact Type: P = Solder male pins, S = Solder female pins, N = PCB female contacts, D = PCB male contacts
- ⑥ Qty of pins: 02 = 2 pins, 03 = 3 pins .....
- ⑦ Cable clamp size: INT13-WF6: A = 3 - 4mm, INT13-WF10: 4 - 6.5mm, INT13-WF12: A = 4 - 6.5mm, B = 5 - 8mm
- ⑧ Variant: 30 indicates that the contacts are 3mm above the end face of the shell

**Appearance :** INT12 and INT13 appearances can be matched in the case of the same series size.



INT12



INT13


### For example

INT13-WF10C10P02A: WF10 series 2 pins plug, pearl chrome, male solder contacts, cable outer diameter range A: 4 – 6.5mm

INT13-WF10C11S02A: WF10 series 2 pins cable mounted receptacle, pearl chrome, female solder contacts, cable outer diameter range A: 4 – 6.5mm

## Part Section Showing Internal Components

\*The contact type can be male contacts or female contacts

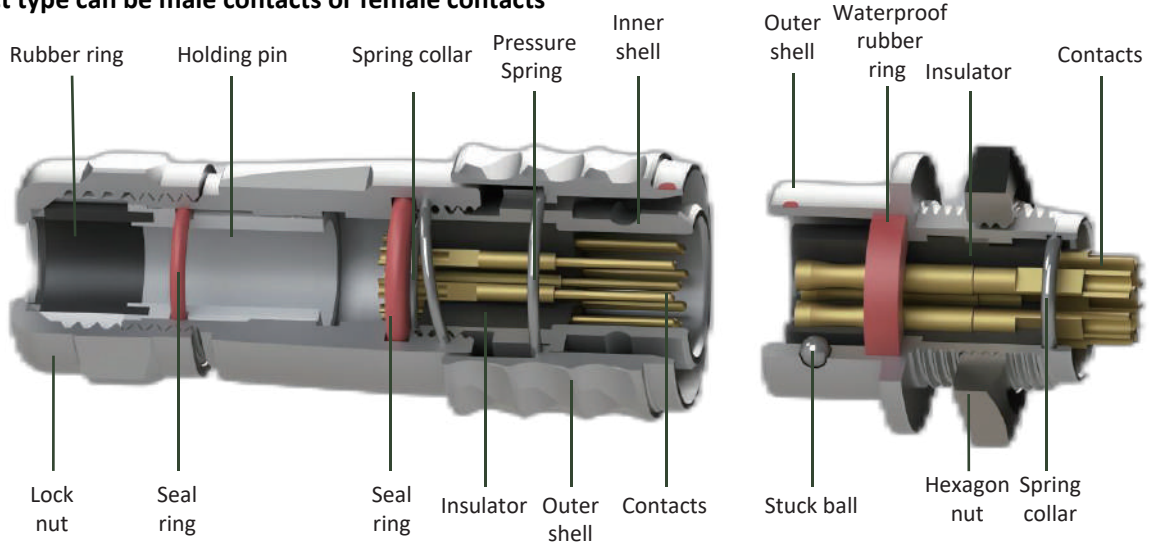


## INT13-WF6 Series

### INT13-WF6 Series Technical Characteristics


Number of Pins	2	3	4	5
Male Insulator Front View				
Rated Current(A)	3	3	3	3
Contact Diameter (mm)	φ0.6 2	φ0.6 3	φ0.6 5	φ0.6 5
Working Voltage (AC.V)	30	30	30	30
Withstand Voltage (AC.V)	500	500	500	500
Contact Resistance (mΩ)	10	10	10	10
Wire Guage (mm <sup>2</sup> /AWG)	≤0.5/20	≤0.5/20	≤0.5/20	≤0.5/20

# INT13-WF6 Series


## INT13-WF6C10 Plug

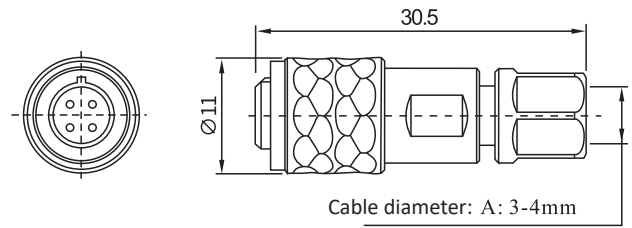

## INT13-WF6C11 Cable mounted receptacle

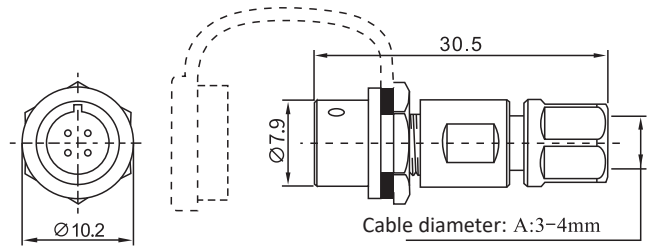

## INT13-WF6C12 Panel mounted receptacle

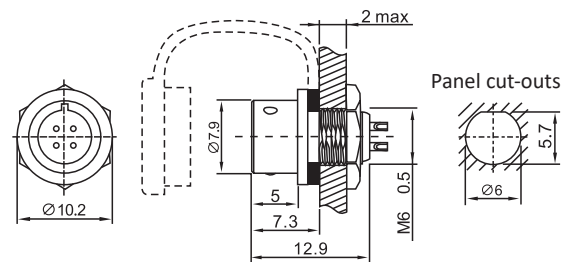


# INT13-WF10 Series

## INT13-WF10 Series Technical Characteristics


Number of Pins	2	3	4	5
Male Insulator Front View				
Rated Current(A)	5	5	5	5
Contact Diameter (mm)	φ1x2	φ1x3	φ0.7x4	φ0.7x5
Working Voltage (AC.V)	180	180	125	125
Withstand Voltage (AC.V)	1000	1000	1000	1000
Contact Resistance (mΩ)	5	5	10	10
Wire Guage (mm <sup>2</sup> /AWG)	≤0.75/18	≤0.75/18	≤0.5/20	≤0.5/20

# INT13-WF10 Series


## INT13-WF10C10 Plug

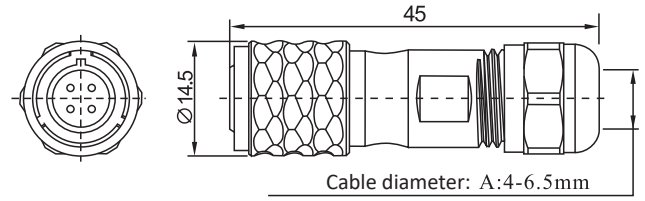

## INT13-WF10C11 Cable Mounted Receptacle

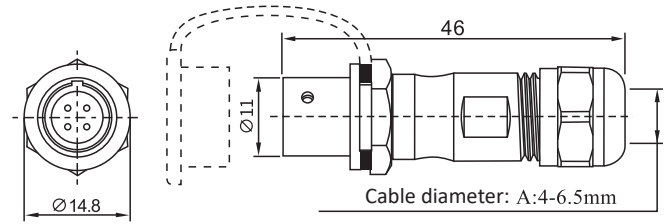

## INT13-WF10C12 Panel Mounted Receptacle

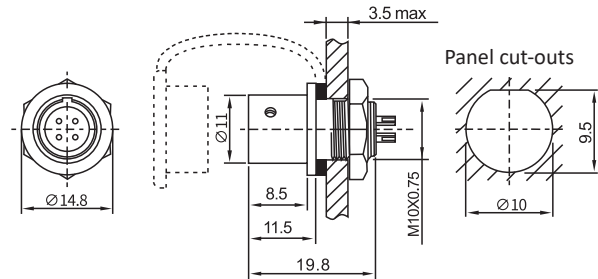


# INT13-WF12 Series



## INT13-WF12 Series Technical Characteristics

Number of Pins	2	3	4	5	6	7	9
Male Insulator Front View							
Rated Current(A)	13	13	5	5	5	5	5
Contact Diameter (mm)	φ1.6x2	φ1.6x3	φ1x4	φ1x5	φ1x6	φ1x7	φ0.7x9
Working Voltage (AC.V)	250	250	200	180	125	125	125
Withstand Voltage (AC.V)	1500	1500	1500	1000	1000	1000	1000
Contact Resistance (mΩ)	2.5	2.5	5	5	5	5	10
Wire Guage (mm <sup>2</sup> /AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20


## INT13-WF12C10-PXXA Plug

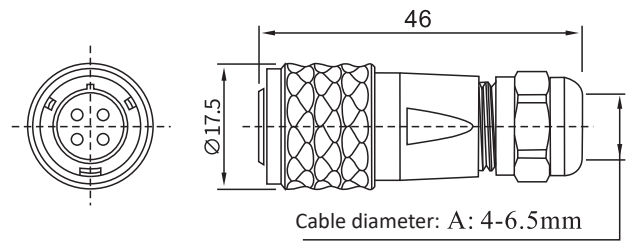


## INT13-WF12C10-PXXB Plug

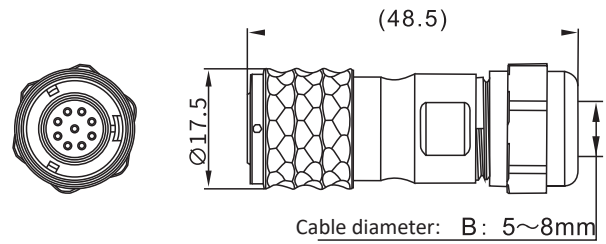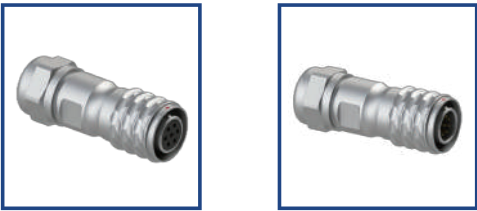



## INT13-WF12C11 Cable Mounted Receptacle

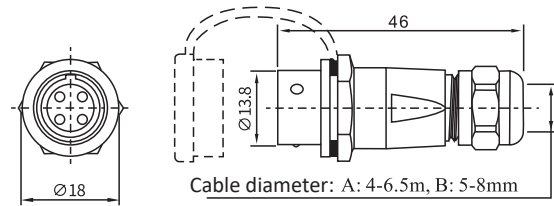

## INT13-WF12C12 Panel Mounted Receptacle

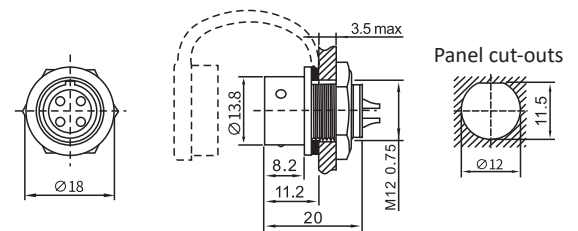


## INT13-WF12C13 Panel Mounted Receptacle

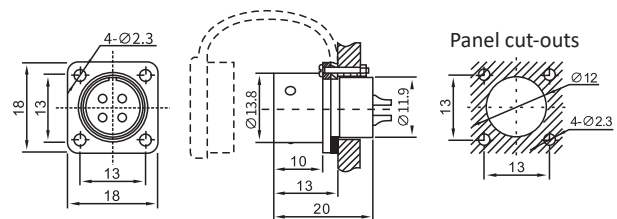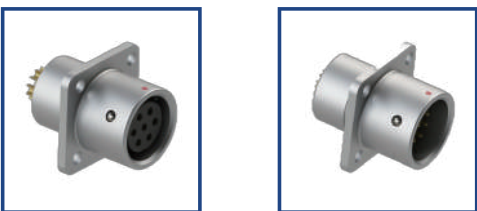

# INTE-AUTO

## PRODUCT CATALOGUE

### Waterproof Connectors

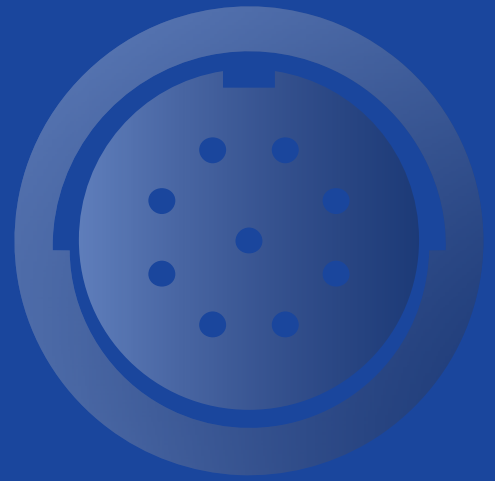

Tel: +86-755-23011350

Fax: +86-755-23239501



[www.inte-auto.com](http://www.inte-auto.com)

[www.intewet.com](http://www.intewet.com)



[info@inte-auto.com](mailto:info@inte-auto.com)



5F, No.7, A area, Baoan Internet Industrial Zone,  
Baoyuan Road, Shenzhen, 518102, China